

Auto tuning of frequency on wireless power transfer for an electric vehicle

Kazuya Yamaguchi, Kenichi Iida

Department of Control Engineering, National Institute of Technology, Nara College, Nara, Japan

Article Info

Article history:

Received Mar 24, 2021

Revised May 25, 2021

Accepted Jun 10, 2021

Keywords:

Adjustment of frequency

Control engineering

Electric vehicle

Mutual inductance

Wireless power transfer

ABSTRACT

In these days, electric vehicles are enthusiastically researched as a countermeasure to air pollution, although these do not have practicality compared to gasoline-powered vehicles. The aim of this study is to transport energy wirelessly and efficiently to an electric vehicle. To accomplish this, we focused on frequency of an alternating current (AC) power supply, and suggested a method which determined the value of it constantly. In particular, a wireless power transfer circuit and a lithium-ion battery in an electric vehicle were expressed with an equivalent circuit, and efficiency of energy transfer was calculated. Furthermore, the optimal frequency which maximizes efficiency was found, and the behavior of voltage was demonstrated on a secondary circuit. Finally, we could obtain the larger electromotive force at the secondary inductor than an input voltage.

This is an open access article under the [CC BY-SA](https://creativecommons.org/licenses/by-sa/4.0/) license.



Corresponding Author:

Kazuya Yamaguchi

Department of Control Engineering, National Institute of Technology, Nara College

22 Yata-cho, Yamatokoriyama, Nara, Japan

Email: k-yamaguchi@ctrl.nara-k.ac.jp

1. INTRODUCTION

In these days, the effect of carbon dioxide (CO₂) is deeply concerned, and it is egested from gasoline-powered vehicles. This problem is the one of factor of global warming, and cars largely account for the rate in a variety of vehicles [1]. On the other hand, the electric vehicles (EV) on which do not egest CO₂ are focused, and it is forecasted that the egesting of CO₂ is reduced to 12 percent at 2050 in contrast with that of 2008 if the next-generation vehicles which contain those prevail in Japan [2]. Many eco-friendly EVs are frequently developed [3]-[5], and those are sold in the world [6], [7]. However, EVs have some problems, for example the spots to charge a lithium-ion battery in EVs are limited, and the time for charging it is considerably long [8]. Thus we can expect to solve those problems if the alternating current (AC) power supplies are set in loads, or on intersections, and moreover wireless power transfer (WPT) is realized from AC power supplies to a lithium-ion battery [9].

Kurs *et al.* [10] reported WPT via magnetic resonance, and it realized highly efficient energy transport. After that, many papers have reported WPT on various application, for example kitchen appliances [11], biomedical implants [12], [13], and satellites on space [14]. Particularly, many researchers are interested in EVs, and they use WPT to improve efficiency of energy transfer, oscillation problem, and atmospheric pollution [15]-[18]. As concrete solutions, [19] devised a configuration of inductors and controlled a phase, [20] controlled a duty cycle of square wave, and [21] utilized impedance matching.

For realizing efficient WPT, the adjustment of frequency of AC power supply is needed, and mutual inductance should be considered as the one of significant parameter. The mutual inductance changes according

to the distance between an AC power supply and a lithium-ion battery [22]. It is important to measure the position of inductors, and calculate the mutual inductance constantly because there are many kinds of designs of vehicles.

In this study, an equivalent circuit of lithium-ion battery is designed by resistors and capacitors, and a WPT circuit is designed to charge and discharge the lithium-ion battery. Efficiency of transportation of electric power is found by the knowledge of control engineering. It proposes a method to determine frequency of AC power supply for highly efficient WPT.

2. DERIVATION OF THE OPTIMAL OPERATING FREQUENCY

2.1. Equivalent circuit of a lithium-ion battery

An equivalent circuit of a lithium-ion battery is designed as follows in Figure 1. It is equivalently expressed with capacitors and resistors, and moreover divided into fast dynamics part, slow dynamics part, and DC voltage source part. In Figure 1, $R_f < R_s$, $C_f < C_s$, and the time constant of slow dynamics part is approximately 10^3 times of that of fast dynamics part [23]-[26].

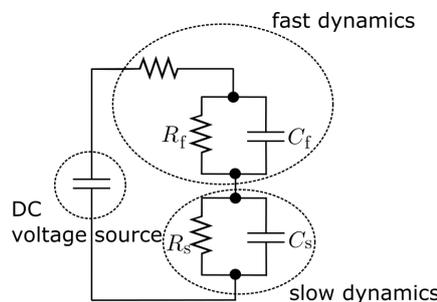


Figure 1. Equivalent circuit of a lithium-ion battery

2.2. Circuit of wireless power transfer and state equation

A WPT circuit to charge and discharge a lithium-ion battery is designed as follows in Figure 2. This circuit is divided into WPT part, rectifier circuit part to charge C_{ocv} , and lithium-ion battery part. In WPT part, L_1, L_2, C_1 , and C_2 are used to cause resonant phenomena, and M is the mutual inductance between L_1 and L_2 . The optimal operating frequency of AC power supply u is determined by these values. Furthermore, the value of M changes in response to the distance between L_1 and L_2 . If switch S is 1, C_{ocv} is charged by induced electromotive force which is rectified by full wave rectifier circuit. On the other hand, if switch S is 2, C_{ocv} discharges and drives the lithium-ion battery.

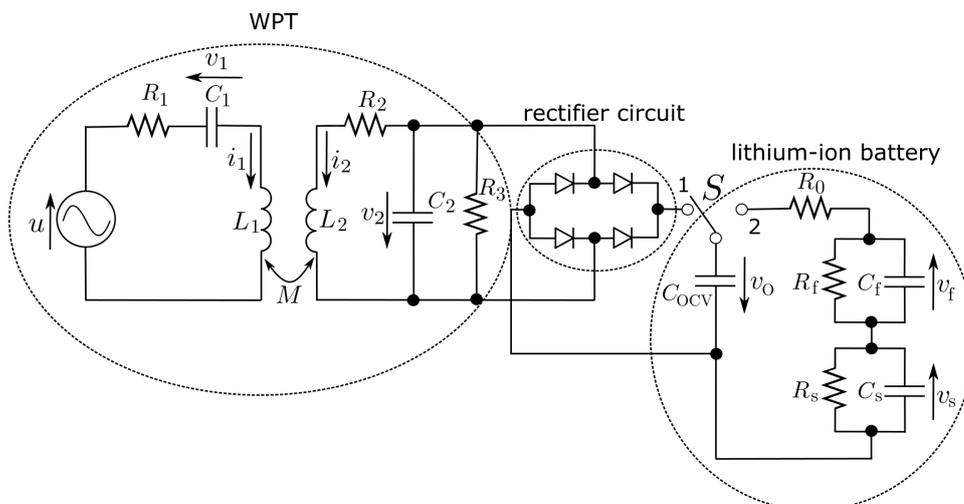


Figure 2. WPT circuit to charge and discharge a lithium-ion battery

The state equation in WPT part can be found by Figure 2 as (1) [26].

$$\dot{x} = Ax + Bu, \quad x = [v_1 \quad v_2 \quad i_1 \quad i_2]^T$$

$$A = \frac{1}{\Delta} \begin{bmatrix} 0 & 0 & \frac{\Delta}{C_1} & 0 \\ 0 & -\frac{\Delta}{R_3 C_2} & 0 & \frac{\Delta}{C_2} \\ -L_2 & M & -R_1 L_2 & R_2 M \\ M & -L_1 & R_1 M & -R_2 L_1 \end{bmatrix}, \quad B = \frac{1}{\Delta} \begin{bmatrix} 0 \\ 0 \\ L_2 \\ -M \end{bmatrix}$$

$$\Delta = L_1 L_2 - M^2 \quad (1)$$

Additionally, in the case of that S is 2, the state equation in lithium-ion battery part can be found as (2).

$$\dot{x} = Ax, \quad x = \left[\frac{dv_o}{dt} \quad v_f \quad v_s \right]^T$$

$$A = \begin{bmatrix} -\frac{1}{R_0 C_{OCV}} \left(1 + \frac{C_{OCV}}{C_f} + \frac{C_{OCV}}{C_s} \right) & \frac{1}{R_0 R_f C_{OCV} C_f} & \frac{1}{R_0 R_s C_{OCV} C_s} \\ \frac{C_{OCV}}{C_f} & -\frac{1}{R_f C_f} & 0 \\ \frac{C_{OCV}}{C_s} & 0 & -\frac{1}{R_s C_s} \end{bmatrix} \quad (2)$$

2.3. The optimal operating frequency to realize high efficiency

Power of power supply u and R_3 are defined as P_{in} and P_{out} respectively, and efficiency η of P_{out} to P_{in} is derived as (3):

$$\eta = \frac{R_3 M^2 \omega^2}{de(\omega)}$$

$$de(\omega) = R_3^2 C_2^2 (R_1 L_2^2 + R_2 M^2) \omega^4$$

$$+ [R_1 (L_2^2 - 2R_3 L_2 C_2 + R_2^2 R_3^2 C_2^2)$$

$$+ (R_2 + R_3) M^2] \omega^2$$

$$+ R_1 (R_2 + R_3)^2 \quad (3)$$

where ω is angular frequency of u . Hence, the optimal operating frequency f_{opt} which maximizes η is found as (4).

$$f_{opt} = \frac{1}{2\pi} \sqrt{\frac{R_2 + R_3}{R_3 C_2}} \left(\frac{R_1}{R_1 L_2^2 + R_2 M^2} \right)^{1/4} \quad (4)$$

Furthermore, M is expressed as (5) [27]:

$$M = \frac{\mu \pi n_1 n_2 r_1^2 r_2^2}{2(r_1^2 + d^2)^{3/2}} \quad (5)$$

where μ is permeability, n_1 and n_2 are the winding numbers of L_1 and L_2 , r_1 and r_2 are the radius of L_1 and L_2 , and d is the distance between L_1 and L_2 . Finally, f_{opt} is substituted as the function of d as (6).

$$f_{opt} = \frac{1}{2\pi} \sqrt{\frac{R_2 + R_3}{R_3 C_2}} \left(\frac{4(r_1^2 + d^2)^3 R_1}{\mu^2 \pi^2 n_1^2 n_2^2 r_1^4 r_2^4 R_2 + 4(r_1^2 + d^2)^3 R_1 L_2^2} \right)^{1/4} \quad (6)$$

3. SIMULATION OF VOLTAGE ON RECEIVING CIRCUIT

3.1. Bode plot and steady voltage which is gained by receiving inductor

For numerical simulation, the values of elements are determined as Table 1. On this situation, mutual inductance M is calculated as $3 \mu\text{H}$ with the (5), and coupling coefficient $k(= M/\sqrt{L_1 L_2})$ is 0.1. Furthermore, f_{opt} is calculated with 29.1 kHz by the (4).

Table 1. Values of elements on the circuit

R_1, R_2	1Ω	n_1, n_2	10
R_3	100Ω	r_1, r_2	0.1 m
L_1, L_2	$30 \mu\text{H}$	d	0.158 m
C_1, C_2	$1 \mu\text{F}$	M	$3 \mu\text{H}$

The transfer function $G(s)$ from voltage of u to v_2 is calculated with the (1) as (7).

$$G(s) = -\frac{3.00 \times 10^{12} s^2}{891s^4 + 6.89 \times 10^7 s^3 + 6.16 \times 10^{13} s^2 + 2.31 \times 10^{18} s + 1.01 \times 10^{24}} \quad (7)$$

Furthermore, bode plot is drawn as Figure 3.

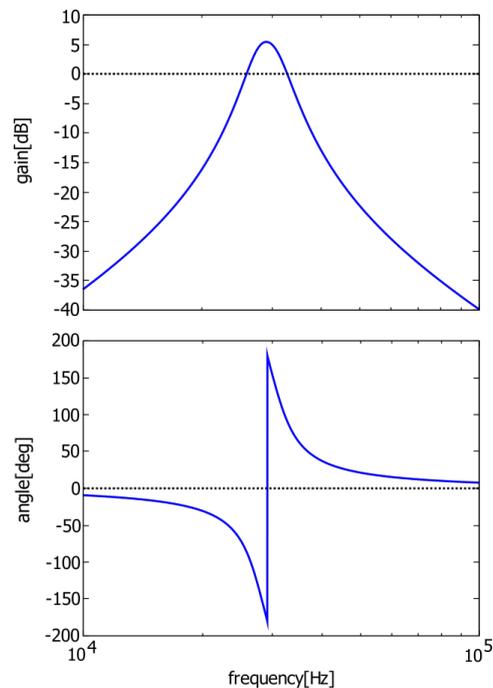


Figure 3. Bode plot from voltage of u to v_2

Moreover, steady solution x_{ss} is found from the state (1), and the stationary wave of open circuit voltage v_{2ss} is drawn in Figure 4. Where E_m is amplitude of u , and the value of it is $E_m = 141 \text{ V}$.

$$x_{ss} = -E_m(\omega I \cos \omega t + A \sin \omega t)(\omega^2 I + A^2)^{-1} B \quad (8)$$

3.2. Discussion

On this situation, gain is obtained as 5.45 dB, and the amplitude of v_{2ss} is calculated as 265 V by driving the circuit at 29.1 kHz. Therefore we can conclude that the higher voltage more than input voltage can be obtained at the secondary circuit. Moreover, the phase difference between u and v_{2ss} is approximately 0.

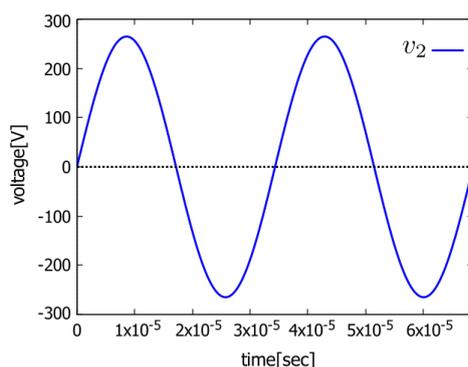


Figure 4. Steady voltage v_{2ss}

4. CONCLUSION

This study tried to improve efficiency of wireless power transmission for an electric vehicle. We certified the relationship between efficiency and distance of inductors because the optimal frequency to realize high power transmission depends on the distance. In the numerical simulation, we could verify that high induced electromotive force can be obtained if frequency of input is adjusted to appropriate value. In the future, the identification of internal systems is always needed to determine the optimal frequency even if the distance between a power supply and loads or the type of load change.

REFERENCES

- [1] B. Kim, G. Fleming, S. Balasubramanian, A. Malwitz, and J. Lee, "System for assessing Aviation's Global Emissions Version 1.5: Global Aviation Emissions Inventories for 2000 through 2004," *FAA-EE-2005-02*, 2005.
- [2] Ministry of the Environment, "The next generation car spread strategy," <https://www.env.go.jp/air/report/h21-01/> (accessed March. 10, 2021).
- [3] V. Oldenbroek, S. Wijtzes, K.Blok, and Ad J.M. van Wijk, "Fuel cell electric vehicles and hydrogen balancing 100 percent renewable and integrated national transportation and energy systems," *Energy Conversion and Management: X*, vol. 9, 2021, Art. No. 100077, doi: 10.1016/j.ecmx.2021.100077.
- [4] B. Lin and W. Wu, "The impact of electric vehicle penetration: A recursive dynamic CGE analysis of China," *Energy Economics*, vol. 94, 2021, Art. No. 105086, doi: 10.1016/j.eneco.2020.105086.
- [5] G. P-S. Naranjo, D. Bolonio, M. F. Ortega, and M-J. García-Martínez, "Comparative life cycle assessment of conventional, electric and hybrid passenger vehicles in Spain," *Journal of Cleaner Production*, vol. 291, 2021, Art. no. 125883, doi: 10.1016/j.jclepro.2021.125883.
- [6] Z. Fan, S. Huang, and X. Wang, "The vertical cooperation and pricing strategies of electric vehicle supply chain under brand competition," *Computers and Industrial Engineering*, vol. 152, 2021, Art. no. 106968, doi: 10.1016/j.cie.2020.106968.
- [7] S. Lee and D-H. Choi, "Dynamic pricing and energy management for profit maximization in multiple smart electric vehicle charging stations: A privacy-preserving deep reinforcement learning approach," *Applied Energy*, vol. 304, no. 15, 2021, Art. no. 117754, doi: 10.1016/j.apenergy.2021.117754.
- [8] K. Miyakita, K. Nakao, M. Sengoku, and S. Shinoda, "Theoretical consideration on the optimum charging time in charging networks of electric vehicles," *IEICE technical report*, vol. 111, no. 105, pp. 157-163, 2011.
- [9] J. Zhang, T-Q. Tang, Y. Yan, and X. Qu, "Eco-driving control for connected and automated electric vehicles at signalized intersections with wireless charging," *Applied Energy*, vol. 282, 2021, Art. No. 116215, doi: 10.1016/j.apenergy.2020.116215.
- [10] A. Kurs, A. Karalis, R. Moffatt, J. D. Joannopoulos, P. Fisher, and M. Soljačić, "Wireless power transfer via strongly coupled magnetic resonances," *Science*, vol. 317, pp. 83-86, 2007, doi: 10.1126/science.1143254.
- [11] Z-H. Wang, Y-P. Li, Y. Sun, C-S.Tang, and X.Lv, "Load detection model of voltage-fed inductive power transfer system," *IEEE Transactions on Power Electronics*, vol. 28, no. 11, pp. 5233-5243, 2013, doi: 10.1109/TPEL.2013.2243756.
- [12] B. D. Truong, E. Andersen, C. Casados, and S. Roundy, "Magnetolectric wireless power transfer for biomedical implants: Effects of non-uniform magnetic field, alignment and orientation," *Sensors and Actuators A: Physical*, vol. 316, 2020, Art. no. 112269, doi: 10.1016/j.sna.2020.112269.
- [13] Y. Palagani, K. Mohanarangam, J. H. Shim, and J. R. Choi, "Wireless power transfer analysis of circular and spherical

- coils under misalignment conditions for biomedical implants,” *Biosensors and Bioelectronics*, vol. 141, 2019, Art. no. 111283, doi: 10.1016/j.bios.2019.04.051
- [14] C. Bergsrud and J. Straub, “A space-to-space microwave wireless power transmission experiential mission using small satellites,” *Acta Astronautica*, vol. 103, pp. 193-203, 2014, doi: 10.1016/j.actaastro.2014.06.033.
- [15] B. Zhang, R. B. Carlson, J. G. Smart, E. J. Dufek, and B. Liaw, “Challenges of future high power wireless power transfer for light-duty electric vehicles-technology and risk management,” *eTransportation*, vol. 2, 2019, Art. No. 100012, doi: 10.1016/j.etrans.2019.100012.
- [16] D. Ustun, S. Balci, and K. Sabanci, “A parametric simulation of the wireless power transfer with inductive coupling for electric vehicles, and modelling with artificial bee colony algorithm,” *Measurement*, vol. 150, 2020, Art. No. 107082, doi: 10.1016/j.measurement.2019.107082.
- [17] B. Shi, F. Yang, C. Hu, and M. Ouyang, “Modelling and improvement of oscillation problem in a double-sided LCC compensation network for electric vehicle wireless power transfer,” *eTransportation*, vol. 8, 2021, Art. No. 100108, doi: 10.1016/j.etrans.2021.100108.
- [18] P. Lazzeroni, V. Cirimele, and A. Canova, “Economic and environmental sustainability of dynamic wireless power transfer for electric vehicles supporting reduction of local air pollutant emissions,” *Renewable and Sustainable Energy Reviews*, vol. 138, 2021, Art. No. 110537, doi: 10.1016/j.rser.2020.110537.
- [19] L. Zhang *et al.* “Demonstration of topological wireless power transfer,” *Science Bulletin*, vol. 66, no. 10, pp. 974-980, 2021.
- [20] S. A. Sis and H. Akca, “Maximizing the efficiency of wireless power transfer systems with an optimal duty cycle operation,” *International Journal of Electronics and Communications*, vol. 116, 2020, Art. No. 153081, doi: 10.1016/j.aeue.2020.153081.
- [21] A. Fereshtian and J. Ghalibafan, “Impedance matching and efficiency improvement of a dual-band wireless power transfer system using variable inductance and coupling method,” *International Journal of Electronics and Communications*, vol. 116, 2020, Art. no. 153085, doi: 10.1016/j.aeue.2020.153085.
- [22] Y. P. Su, X. Liu, and S. Y. Ron Hui, “Mutual inductance calculation of movable planar coils on parallel surfaces,” *IEEE Transactions on power electronics*, vol. 24, no. 4, pp. 1115-1124, 2009, doi: 10.1109/TPEL.2008.2009757.
- [23] S. Fukunaga, T. Kawaguchi, S. Adachi, K. Itabashi, T. Iwahana, and N. Teranishi, “Parameter estimation of lithium-ion secondary battery using equivalent circuit,” *The 53th Japan Joint Automatic Control Conference*, pp. 577-580, 2010.
- [24] A. Farmann and D. U. Sauer, “Comparative study of reduced order equivalent circuit models for on-board state-of-available-power prediction of lithium-ion batteries in electric vehicles,” *Applied Energy*, vol. 225, pp. 1102-1122, 2018, doi: 10.1016/j.apenergy.2018.05.066.
- [25] L. Zhang, Z. Wang, X. Hu, F. Sun, and D. G. Dorrell, “A comparative study of equivalent circuit models of ultracapacitors for electric vehicles,” *Journal of Power Sources*, vol. 274, pp. 899-906, 2015, doi: 10.1016/j.jpowsour.2014.10.170.
- [26] K. Yamaguchi, K. Onishi, and K. Iida, “Wireless power transfer to a micro implant device from outside of human body,” *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 9, no. 3, pp. 1541-1545, 2019, doi: 10.11591/ijece.v9i3.pp1541-1545.
- [27] K. Onishi, K. Yamaguchi, and K. Iida, “Wireless power transfer using multiple-transmitters for high stability for position,” *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 10, no. 3, pp. 2245-2249, 2020, doi: 10.11591/ijece.v10i3.pp2245-2249.