

## Rectangular Microstrip Patch Antenna at 2GHZ on Different Dielectric Constant for Pervasive Wireless Communication

Md. Maruf Ahamed, Kishore Bhowmik, Md. Shahidulla,

Md. Shihabul Islam, Md. Abdur Rahman

Department of Electronics and Telecommunication Engineering,

Rajshahi University of Engineering & Technology

Bangladesh

---

### Article Info

#### Article History:

Received Mar 31<sup>th</sup>, 2012

Revised May 5<sup>th</sup>, 2012

Accepted May 12<sup>th</sup>, 2012

#### Keyword:

Microstrip antenna

Patch width

Patch length

Strip width

Strip length

---

### ABSTRACT

In this Paper presents the result for different dielectric constant values and the result is performed by thickness of 2.88mm and resonance frequency of 2GHz where 2.32 (Duroid) are gives the best result. In the recent years the development in communication systems requires the development of low cost, minimal weight, low profile antennas that are capable of maintaining high performance over a wide spectrum of frequencies. This technological trend has focused much effort into the design of a Microstrip patch antenna. The proposed antenna design on different dielectric constant and analyzed result of all dielectric constant from 1 to 10, when the proposed antenna designs on Duroid substrate with dielectric constant 2.32. At 2GHz verified and tested result on MATLAB are Radiation Efficiency=91.99%, Directivity=5.4dBi, Directive gain=4.98dBi and Half Power Beam Width-H plane=99.6123 degrees.

Copyright © 2012 Institute of Advanced Engineering and Science.  
All rights reserved.

---

### Corresponding Author:

Md. Maruf Ahamed,

Department of Information Technology (IT) Cambridge Maritime College-CMC,

Sector # 09, Road # 3/F, House # 06, Uttara Model Town,

Dhaka-1230, Bangladesh.

Email: marufete.ruet@gmail.com

---

## 1. INTRODUCTION

The rectangular patch antenna is approximately a one-half wavelength long section of rectangular Microstrip transmission line [1]. When air is the antenna substrate, the length of the rectangular Microstrip antenna is approximately one-half of a free-space wavelength [1, 2]. As the antenna is loaded with a dielectric as its substrate, the length of the antenna decreases as the relative dielectric as its substrate, the length of the antenna decreases as the relative dielectric constant of the substrate increases [3]. The antenna has become a necessity for many applications in recent wireless communication such as radar, microwave and space communication. The specifications for the design purpose of the structure are as follows

[i] Type of antenna: Rectangular Microstrip Patch antenna

[ii] Resonance frequency: 2GHz

[iii] Input impedance: 50  $\Omega$

[iv] Feeding method: Microstrip Line Feed

The specifications were chosen to design a light wave and compact Microstrip patch antenna. The design of the whole structure is performed in the following steps [6]

[i] Initially, select the desired resonant frequency, thickness and dielectric constant of the substrate

[ii] Obtain width(W) of the patch by inserting

[iii] Obtain Length (L) of the patch after determining

## 2. DESIGN CONSIDERATIONS FOR RECTANGULAR PATCH ANTENNA

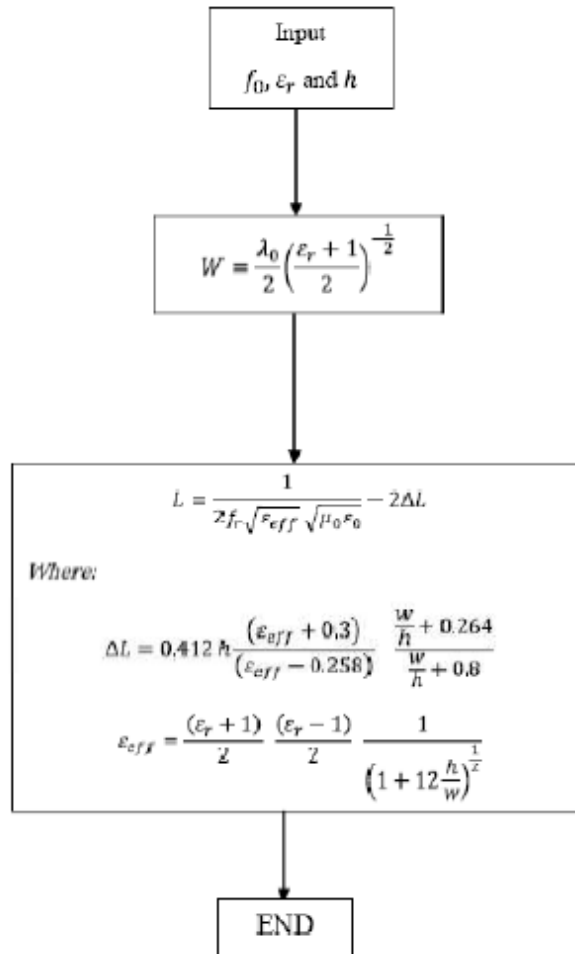


Figure 1. Flow chart based on usual design procedure for rectangular patch antenna

## 3. SIMULATION RESULT

Table 1. Comparison between the different design with their responses and results

Parameter	Design 1	Design 2
Height	2.88mm	2.88mm
Width	45.2mm	58.2mm
Length	34.6mm	47.8mm
Resonance Frequency	2GHz	2GHz
Dielectric Constant	4.5 (Rogers TMM4)	2.32 (Duroid)
Radiation Efficiency	84.38%	91.99%
Directivity	4.2959	5.4211
Directive Gain	3.6251	4.9867
Half power beam Width-H plane	60.8814	99.6123

#### 4. DESIGN OF THE RECTANGULAR MICROSTRIP PATCH ANTENNA USING EAGLE V-5.6.0

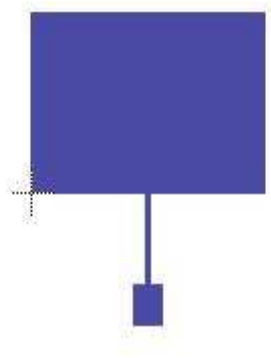


Figure 2. PCB Layout Design for Design 1 consideration  
(Thickness  $h=2.88\text{mm}$ , Resonance frequency=2 GHz, Rogers TMM4 used as Dielectric substrate)

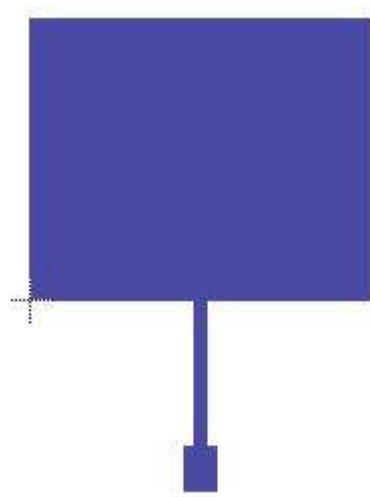


Figure 3: PCB Layout Design for Design 2 consideration  
(Thickness  $h=2.88\text{mm}$ , Resonance frequency=2 GHz, Rogers TMM4 used as Dielectric substrate)

#### 5. PERFORMANCE ANALYSIS OF THE RECTANGULAR MICROSTRIP PATCH ANTENNA USING MATLAB

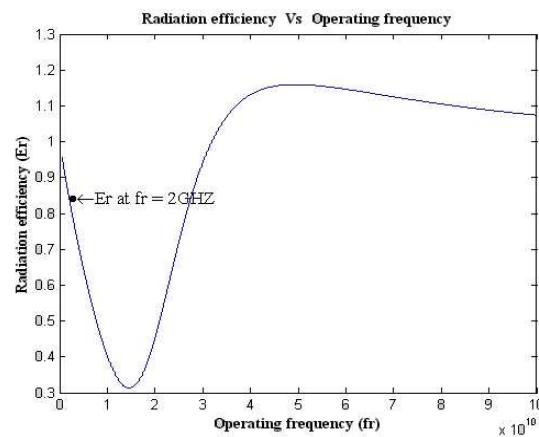


Figure 4. Variation of radiation efficiency with operating frequency for the microstrip patch with  $h=2.88\text{mm}$  and  $E_r=4.5$ [Rogers TMM4]

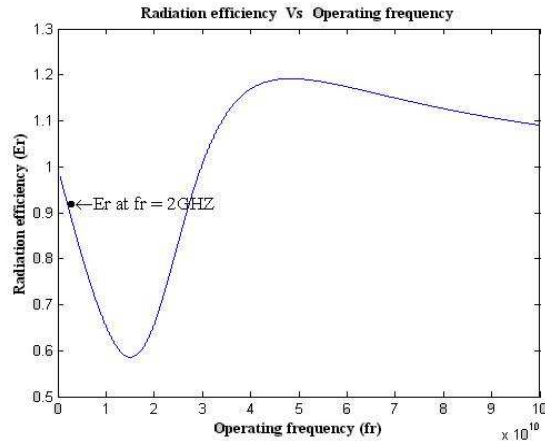


Figure 5. Variation of radiation efficiency with operating frequency for the Microstrip patch with  $h=2.88\text{mm}$  and  $\epsilon_r=2.32$  [Duroid]

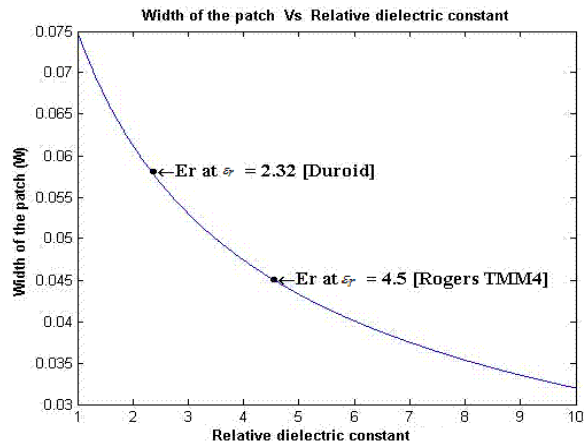


Figure 6. Variation of Width of the Patch with Relative Dielectric constant for the Microstrip patch with  $h=2.88\text{mm}$  and  $f_r=2\text{GHz}$

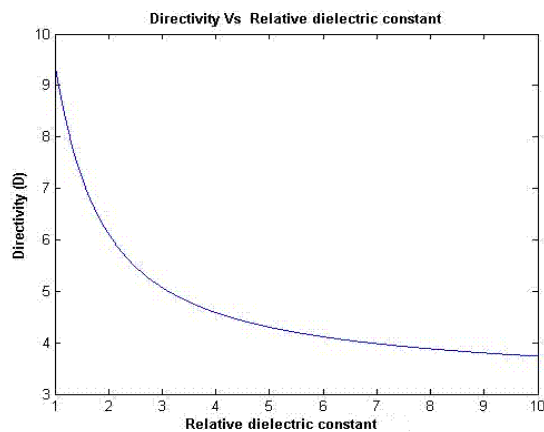


Figure 7. Variation of Directivity with Relative Dielectric Constant for the Microstrip patch with  $h=2.88\text{mm}$  and  $f_r=2\text{GHz}$

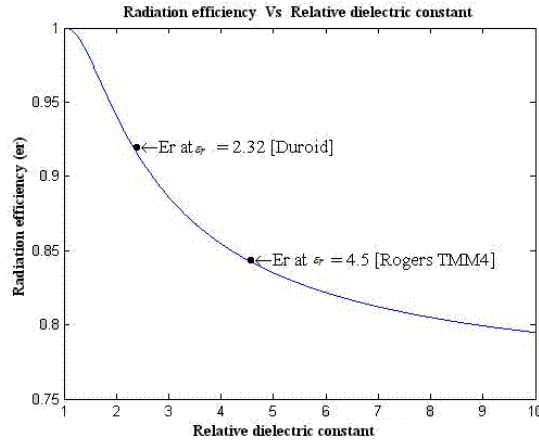


Figure 8. Variation of radiation efficiency with relative dielectric constant for the microstrip patch with  $h=2.88\text{mm}$  and  $f_c=2\text{GHz}$

6. RADIATION PATTERN ANALYSIS USING PCAAAD 5.0

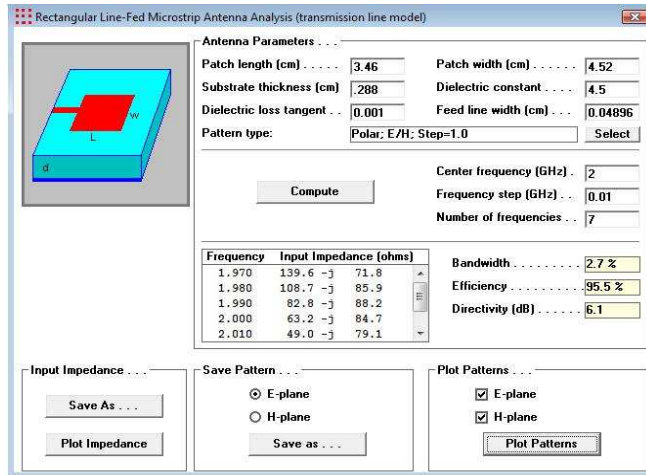


Figure 9. PCAAAD arrangement and result

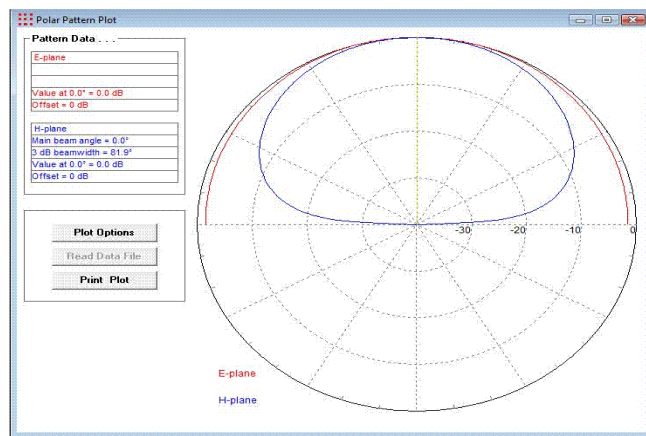


Figure 10. Radiation pattern of E-field and H-field

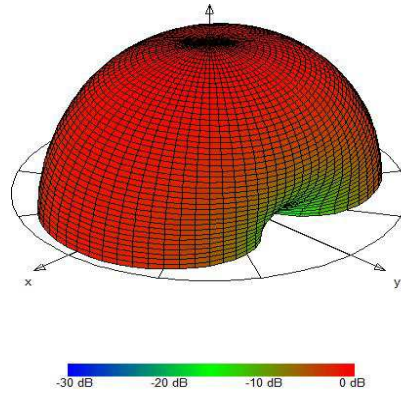


Figure 11. 3-D Radiation Pattern of the Rectangular Microstrip Patch Antenna using PCAAD 5.0

## 7. COMPARISON BETWEEN THE TWO DIFFERENT DESIGNS WITH RESPONSES USING PCAAD 5.0

Table 2. Comparison between two different designs with their responses

Parameter	Design 1	Design 2
Bandwidth	2.7%	2.6%
Efficiency	95.5%	95.4%
3dB Beam Width	81.90°	77.30°

## 8. VARIATION OF RADIATION EFFICIENCY WITH RELATIVE DIELECTRIC CONSTANT BY USING MATLAB PROGRAM

```

clc
clear
fr=input('Enter the value of resonant frequency: ');
h=input('Enter the HIGHT of the substrate:');
disp(' ')
i1=input('Enter the lower limit of the Relative dielectric constant :');
i2=input('Enter the upper limit of the Relative dielectric constant :');
er=i1:.01:i2;
k=(2*pi*fr).*(sqrt((8.854e-12)*(pi*4e-7)));
Pr=40.*(k.^2).*((k.*h).^2).*(1-(1./er)+(2./(5.*er.^2)));
x0=1+( 0.5.* ((er-1).*k.*h./er).^2 );
X0=(x0.^2)-1;
Psur=((30.*pi.*k.^2).*(er.*((x0.^2)-1))./((er.*( 1./sqrt(X0))+sqrt(X0)./er-
x0.^2)))+(k.*h).*(1+ ((X0.*er.^2)./(er-x0.^2))));
Er=Pr./(Pr+Psur);
figure(1)
er13=i1:.01:i2;
plot(er13,Er)
xlabel('Relative dielectric constant (er)')
ylabel('Radiation efficiency (er)')
grid on
title('Radiation efficiency Vs Relative dielectric constant')
k=(2*pi*fr).*(sqrt((8.854e-12)*(pi*4e-7)));
Pr=40.*(k.^2).*((k.*h).^2).*(1-(1./4.5)+(2./(5.*4.5.^2)));
x0=1+( 0.5.* ((4.5-1).*k.*h./4.5).^2 );
X0=(x0.^2)-1;
Psur1=((30.*pi.*k.^2).*(4.5.*((x0.^2)-1))./((4.5.*((1./sqrt(X0))+sqrt(X0)./4.5-
x0.^2)))+(k.*h).*(1+ ((X0.*4.5.^2)./(4.5-x0.^2))));
Ef1=Pr./(Pr+Psur1);
text(4.5,Ef1,...
'\bullet\leftarrow\fontname{times}Er at {er} = 4.5 [Rogers TMM4] ',...
'FontSize',12)
k=(2*pi*fr).*(sqrt((8.854e-12)*(pi*4e-7)));
Pr=40.*(k.^2).*((k.*h).^2).*(1-(1./2.32)+(2./(5.*2.32.^2)));
x0=1+( 0.5.* ((2.32-1).*k.*h./2.32).^2 );
X0=(x0.^2)-1;

```

```

Psur2=((30.*pi.*k.^2).*(2.32.*((x0.^2)-1))./((2.32.*((1./sqrt(X0)))+(sqrt(X0))./2.32-
x0.^2))+((k.*h).*(1+((X0.*2.32.^2)./(2.32-x0.^2)))));
Ef2=Pr./(Pr+Psur2);
text(2.32,Ef2,...
'\bullet\leftarrow\fontname{times}Er at {er} = 2.32 [Duroid]',...
'FontSize',12)

```

### Program Input:

Enter the value of resonant frequency: 10e9

Enter the HIGHT of the substrate:2.88e-3

Enter the lower limit of the Relative dielectric constant :2

Enter the upper limit of the Relative dielectric constant :9

## 9. CONCLUSION

The aim of this project is to design a rectangular patch Microstrip antenna and to study the responses and the radiation properties of the same. In this project an antenna has been designed with 2 different design parameters. Taking all this into consideration we can say that there are many aspects that affect the performance of the antenna. Dimensions, selection of the substrate, feed technique and also the Operating frequency can take their position in effecting the performance. A rigorous analysis of the problem begins with the application of the equivalence principle that introduces the unknown electric and magnetic surface current densities on the dielectric surface. The formulation of the radiation problems is based on the numerical solution of the combined field integral equations.

## ACKNOWLEDGEMENTS

On the first hand we express our highest gratitude and thanks to my supervisor, **Md. Delwar Hossain** who helped us at each and every point of this thesis work, with his suggestions and guidance which put us on the right path to fulfill the requirement without this we wouldn't be able to presenting this thesis work. Support from the **“Department of Electronics and Telecommunication Engineering”** Rajshahi University of Engineering and Technology (RUET) is much appreciated in providing us the facility which encouraged us to work more and more. Special thanks to all Microwave Lab assistants for their cordial helps in various ways to complete this hard work.

And last but not the least, I express my hearty thanks to Creator ALLAH and all those who supported us directly or indirectly to complete this task.

## REFERENCES

- [1] C. A. Balanis, *Antenna Theory Analysis and Design*, Jhon Wiley & Sons, Inc., Second Edition, 1996.
- [2] Manik Gujral, Tao Yuan, Cheng-Wei Qui, Le-Wei Li and Ken Takei, “Bandwidth Increment of Microstrip Patch Antenna Array with Opposite Double- E Ebg Structure for Different Feed Position”, *International Symposium on Antenna and Propagation*, Inc. NY, USA, ISP- 2006.
- [3] Richard C. Johnson, Henry Jasik, "Antenna Engineering Handbook" Second Edition, pp. 7-1 to 7-14, McGraw Hill, 1984.
- [4] Pozar, D. M., and D. H. Schaubert (Eds), "The Analysis and Design of Microstrip Antennas and Arrays", *IEEE Press*, New York, 1996.
- [5] D. Urban and G. J. K. Moernaut, "The Basics of Patch Antennas" *Journal, Orban Microwave Products*.
- [6] Y T Lo and S W Lee, editors, "Antenna Handbook Theory, Applications & Design", Van Nostrand Rein Company, NY, 1988.
- [7] Franco Di Paolo, "Networks and Devices using Planar Transmission Lines", pp 71, CRS Press, LLC, NY, 2000.
- [8] Stutzman Warren L & Tuicle Gray A, "Antenna Theory & Design", John Wiley & SonsInc., NY, 1988.
- [9] M. Olyphant, Jr. and T.E Nowicki, "Microwave Substrates Support MIC technology" *Microwaves*, Part I, vol. 19, no. 12, pp. 74-80, Nov. 1980.
- [10] Richard, W.F., Y.T. Lo, and D.D Harrison, “An Improved Theory for Microstrip Antennas and Application,” *IEEE Trans. On Antennas and Propagation*. vol. AP-29, pp. 38-46, 1981.

**BIOGRAPHY OF AUTHORS**

**Md. Maruf Ahamed** completed his B.Sc. in Electronics and Telecommunication Engineering from Rajshahi University of Engineering & Technology, Bangladesh in 2010. Now he is a lecturer, Department of Information Technology in Cambridge Maritime College-CMC, Bangladesh and before joining there he was adjunct faculty in International Islamic University Chittagong, Dhaka Campus. He is current IEEE member in RUET branch Bangladesh. His areas of interest are Antennas and Propagation, VOIP, Mobile Ad-Hoc Network and Wireless Communication and Network.



**Kishore Bhowmik** completed BSc in Electronics and Telecommunication Engineering Department from Rajshahi University of Engineering & Technology, Bangladesh in 2010. Currently he is working as a System Engineer in Grameenphone Limited. His current research interests include Antennas and Propagation, mobile and wireless communications and Coding Theory.



**Md. Shahidulla** completed his BSc Engineering from Rajshahi University of Engineering and Technology under the department of Electronics and Telecommunication Engineering, Bangladesh in April 2010. Currently he is working as a Head, Dept. of Telecommunication Engineering at Saic Institute of Management and Technology, Bangladesh. His current research interest includes Antenna and Propagation, Mobile and Wireless communication and WiMAX Technology.



**Md. Shihabul Islam** completed BSc in Electronics and Telecommunication Engineering Department from Rajshahi University of Engineering & Technology, Bangladesh in 2010. Currently he is working as a System Engineer in Grameenphone Limited. His current research interests include Antennas and Propagation, wireless sensor network.



**Md. Abdur Rahman** completed B.Sc. in Electronics and Telecommunication Engineering Department from Rajshahi University of Engineering & Technology, Bangladesh in 2010. Currently he is working as an instructor of the Department of Electronics and Telecommunication Engineering of Ahsanullah Institute of Technical and Vocational Education and Training, Bangladesh. His current research interests include Antennas and Propagation, mobile and wireless communications and Coding Theory.