

Campus realities: forecasting user bandwidth utilization using Monte Carlo simulation

Haruna Bege, Aminu Yusuf Zubairu

Department of Computer Engineering, Nuhu Bamalli Polytechnic, Nigeria

Article Info

Article history:

Received Oct 31, 2019

Revised Mar 12, 2020

Accepted Mar 30, 2020

Keywords:

Bandwidth utilization

Campus network

Monte Carlo simulation

ABSTRACT

Adequate network design, planning, and improvement are pertinent in a campus network as the use of smart devices is escalating. Underinvesting and overinvesting in campus network devices lead to low network performance and low resource utilization respectively. Due to this fact, it becomes very necessary to ascertain if the current network capacity satisfies the available bandwidth requirement. The bandwidth demand varies from different times and periods as the number of connected devices is on the increase. Thus, emphasizing the need for adequate bandwidth forecast. This paper presents a Monte Carlo simulation model that forecast user bandwidth utilization in a campus network. This helps in planning campus network design and upgrade to deliver available content in a period of high and normal traffic load.

Copyright © 2020 Institute of Advanced Engineering and Science.
All rights reserved.

Corresponding Author:

Haruna Bege,
Department of Computer Engineering,
Nuhu Bamalli Polytechnique,
Kaduna State, Nigeria.
Email: begeharuna@gmail.com

1. INTRODUCTION

At the inception of the internet, only limited users were found online in a typical campus network because mobile smart devices were not common. As mobiles and smart devices started exploding, bandwidth became a strain on-campus network due to streaming media like YouTube, Netflix, Facebook amongst others. Now, scientific education is moving to the cloud making file transfer consume more bandwidth on the campus network [1-5]. Thus, driving many campus network operators to evaluate capacity upgrade. Due to cost particularly in developing countries, many higher institutions and Universities have not kept to the pace of network technology investment. However, it is pertinent that these universities find a way to upgrade their campus network and extend the life of existing infrastructure while simplifying the architecture to enable the low cost of operation [6-10]. Higher institutions and University education missions are also dependent on their network capabilities. But most of the traditional campus network designs were built to operate on a three-tiered routed network model. This model assumes that learning in higher institution and universities take place in classrooms and data is mostly consumed only within the classroom environment. Nonetheless, demand varieties in campus networks that support the use of mobile technologies, cloud applications, research files, and data transfers must be attended to [11-17]. Figure 1 shows the diagram of a typical campus traffic allocation.

It is evident that these days applications are growing. The use of bandwidth and campus network traffic is deterministic from end-users accessing content from the internet or cloud data centers. Therefore, there is a need to develop a model on a high bandwidth network that will help schedule data movements [18-19]. Efficient network performance is achieved if the planning of network usage is done a priori. Hence, there is a need to build a model that can predict data usage for real-world traffic in the campus network. This will help not only in planning and upgrading campus network resources but also improve the overall performance of the network in terms of bandwidth consumption [20-23]. Literature in

the past has tried to address the issue of bandwidth utilization in campus and residential networks by forecasting the bandwidth demands for aggregated subscribers as presented in the works of [1-4]. The use of statistical techniques was employed to quantify the concurrent number of traffic of fixed access networks with a specific target to residential areas only. [18-21] explicitly developed an adaptive bandwidth management system for higher education institutions with a view to increasing the bandwidth of the users who access more educational websites. The theory of their design was based on the work of the authors in [24] that studied the utilization of bandwidth in the face of increased internet traffic in the era of 'bring your own device'(BYOD) and increased digital content. Traffic policing and shaping was applied to prioritize traffic to effectively utilize bandwidth. A hybrid data mining scheme that utilized clustering and classification for the allocation of bandwidth in a priority-based manner has also been used to manage bandwidth as presented in the work of [25]. The essence of the work was to study and forecast students' behavioral patterns in a campus network and determine the primary aspects that influence the students in browsing the internet. The reviewed works showed that there is still a need to develop a user bandwidth utilization model based on campus realities.

Hence, the contribution of this paper is the development of a realistic model based on the experimental setup that can forecast user bandwidth utilization in a campus network from the User end. The remaining aspects of the paper are itemized as follows: section two presents the review of related works, its contributions, and limitations. In section three, the model formulation as well as governing equations. Results analysis and conclusions drawn from in section four and section five respectively.

2. RESEARCH METHOD

The step by step approach employed for successfully implementing the proposed model presented in this paper are discussed as follows.

2.1. Campus network design and upgrade

Usually, in a campus network, the best-used design is the hierarchical network design. This design presents three layers which are the core layer, the distribution layer, and the access layer. The distribution layer switches at higher layers are directly connected to the internet, while access layer switches are directly connected to the end-users (computer or smart devices). To collect data, we set up a network from higher layers to lower layers in the hierarchies of networks. We had a dedicated database server responsible for the collection of network traffic and network behavior. This server was in operation 24/7 with a view to providing an adequate result. As depicted in Figure 2, we collected traffic data on a private network by configuring different user profiles. This is a typical scenario of a campus network where each student or staff user has a unique username and password for accessing the internet.

2.2. Traffic generation

Approximately, 50 computers (users) were accessing and surfing various websites on the network at the same time 24/7 using their login profile to generate diversified traffic within a particular interval of time. The captured traffic from different LANs and WANs is monitored and stored in a database server. This is done constantly without any interruption and downtime. The daily, weekly and monthly traffic data generated shows the average bandwidth and resource usage information of the testbed network based on the login in the information of the Mikrotik device as in Figures 2–5. As a network setup testbed, it was subjected to rigorous usage within a week to collect traffic data as presented in Figures 3–5.

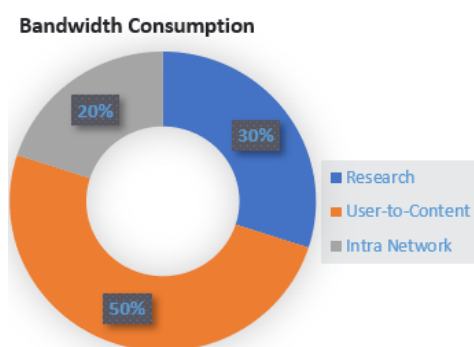


Figure 1: Typical campus traffic allocation

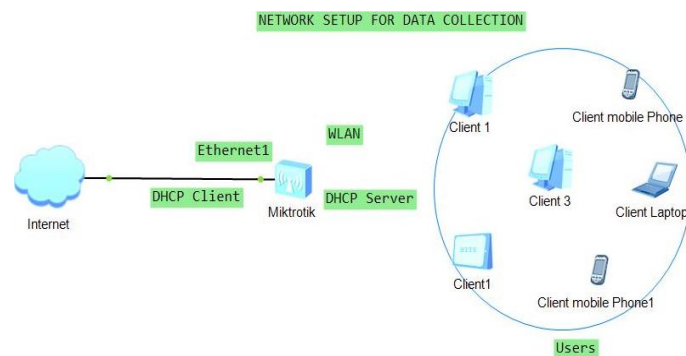


Figure 2. Topology for data collection

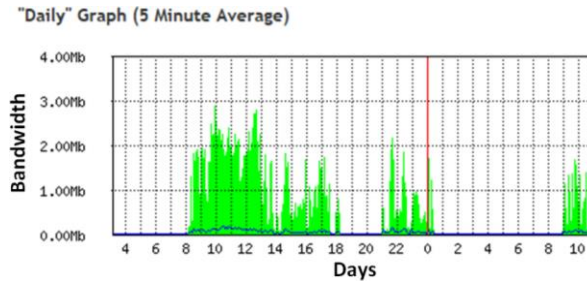


Figure 3. Daily average usage

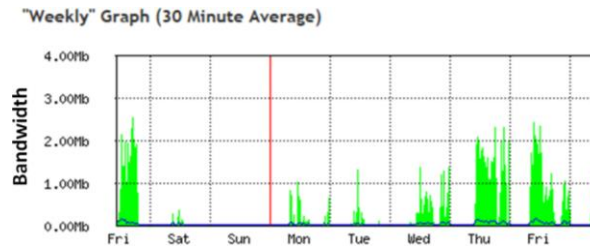


Figure 4. Weekly average usage

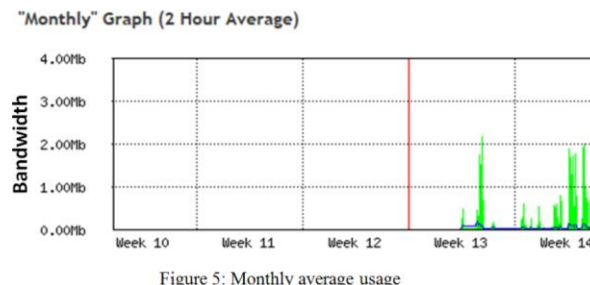


Figure 5: Monthly average usage

Figure 5. Monthly average usage

2.3. Traffic observation

In this particular research paper, we try to monitor the In-Out traffic on the Router's port for all the incoming and outgoing traffic with the aid of the Wireshark software. This was done to achieve an accurate and precise result. The packets sent were recorded for varying times in hours and minutes as shown in Figure 6 using Wireshark. From the Wireshark software, the values in Table 1 were extracted that shows the payload used in each day by all the users surfing the net.

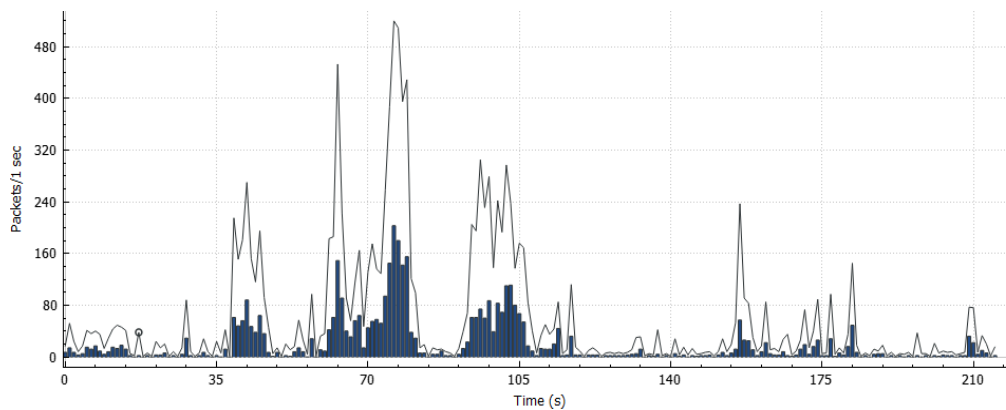


Figure 6. Sample of traffic observed

As presented in the captured sample data in Table 1, we have the bandwidth payload captured for the different days of the week. The payload is comprised of traffic generated from research, social media and video streaming sites. This was monitored and presented in Table 2 according to their usage.

Table 1. Extracted sample data

S/N	Days	Week Day	Time (Hours)	Payload (Kilobytes)
1	Day 1	Thursday	24	1184110.82
2	Day 2	Friday	24	4910853.06
3	Day 3	Saturday	24	5978301.75
4	Day 4	Sunday	24	4644118.73
5	Day 5	Monday	24	8899905.00
6	Day 6	Tuesday	24	5476324.33
7	Day 7	Wednesday	24	1234567.67
8	Day 8	Thursday	24	3214561.65
9	Day 9	Friday	24	4567891.76
10	Day10	Saturday	24	1289085.76
11	Day11	Sunday	24	5965301.75
12	Day12	Monday	24	4710835.06
13	Day13	Tuesday	24	3116451.14
14	Day14	Wednesday	24	3011344.68
15	Day15	Thursday	24	1156789.10
16	Day16	Friday	24	9867543.10
17	Day17	Saturday	24	1235471.12
18	Day18	Sunday	24	1117854.19
19	Day19	Monday	24	1213450.78
20	Day20	Tuesday	24	4348721.11
21	Day21	Wednesday	24	3216783.10
22	Day22	Thursday	24	2315676.10
23	Day23	Friday	24	7653293.10
24	Day24	Saturday	24	2569791.76
25	Day25	Sunday	24	6215643.1
26	Day26	Monday	24	1247321.88
27	Day27	Tuesday	24	4126543.00
28	Day28	Wednesday	24	3354678.01
29	Day29	Thursday	24	1123863.11
30	Day30	Friday	24	4590345.72

Table 2. Category of traffic usage

S/N	Traffic Type	Usage
1	Research activity	Medium
2	Social media	high
3	Live to stream	Low

3. RESULTS AND DISCUSSIONS

Looking at the network topology in Figure 2, and from the sample of data traffic collected, our creative outcomes help the analytical results for decision making and precision the network bandwidth. Based on the data collected, our analysis and result are as follows. Let the total number of users a campus network can concurrently support be U , amount of available network bandwidth in an institution be A , average utilization be K , average utilization per applications be K_p and transfer data rate be D . Therefore,

$$U = \frac{A_b}{8 * T_d} \quad (1)$$

where A_b is the available bandwidth, T_b is the transfer data rate and U is the current user. The amount of available bandwidth is in Gbps and needs to be converted to Mbps to determine how much bandwidth each application is consuming. The bandwidth total $B(Mbps)_T$ can be calculated as:

$$B(Mbps)_T = (U * K_{pR}) + (U * K_{psm}) + (U * K_{pls}) \quad (2)$$

where K_{pR} is data usage on research, K_{psm} is data usage on social media, K_{pls} is data usage on live streaming. The required minimum bandwidth is calculated using (3) as:

$$B_{min} = \frac{A_b}{U} \quad (3)$$

The bandwidth utilization of each user can be limited (increased or decreased) using (4).

$$B_{control} = B_{min} + \frac{\delta\tau + \eta + \alpha}{\gamma} \times B_{min} \quad (4)$$

where δ is the number of research sites accessed, η is the number of the live streaming site accessed, α is the number of social media site accessed and γ is the total number of sites accessed?

3.1. Bandwidth forecast using Monte Carlo simulation

The steps employed for the Monte Carlo simulation are highlights as follows

a. Step 1

Sort the data in ascending order.

b. Step 2

Compute the margin of the extremum and calculate the number of intervals using (5) and (6) respectively.

$$\phi = |x_{max} - x_{min}| \quad (5)$$

$$m = \sqrt{x_n} \quad (6)$$

where ϕ is the extremum margin, x_{max} is the maximum of the data, x_{min} is the minimum of the data, m is the number of intervals and x_n is the total number of elements in the data. Then the margin (ω) between the lower and upper bound of the data is calculated using (7).

$$\omega = \frac{\phi}{m} \quad (7)$$

The equation shows the margin between the upper and lower bound of 5 intervals. Based on (5)-(7), the calculated interval values are given in Table 3.

c. Step 3

In this step, we compute the frequency distribution and then converted into probability values. Thereafter the cumulative probability distributions are computed as shown in Table 4. The daily payload occurrence probability is shown in Figure 7. From Figure 7, it can be observed that the payload with a higher probability of occurrence falls within the interval values of the first interval. The corresponding probability of the order intervals is as given in the figure. Using this information, we can perform a probability and the Anderson Darling test is given in Figure 8. It was observed that the data follows a normal probability distribution with a p-value=0,664 \geq $\alpha=0,05$. Thus, fifty (50) normally distributed random numbers were generated for each day of the month using Minitab simulator. Table 5 shows samples of the generated random numbers

Table 3. Interval values

Interval No.	Interval Value (Kilobytes)
1	11178.54-2867792
2	2867793-4617730
3	4617731-6367668
4	6367669-8117606
5	8117607-9867543

Table 4. Cumulative probability distribution

Interval No.	Interval Values	Frequency	Occurrence Probability	Cumulative Probability
1	1117854-2867792	11	0.37	0.37
2	2867793-4617730	9	0.30	0.67
3	4617731-6367668	7	0.23	0.90
4	6367669-8117606	1	0.03	0.93
5	8117607-9867543	2	0.07	1.00

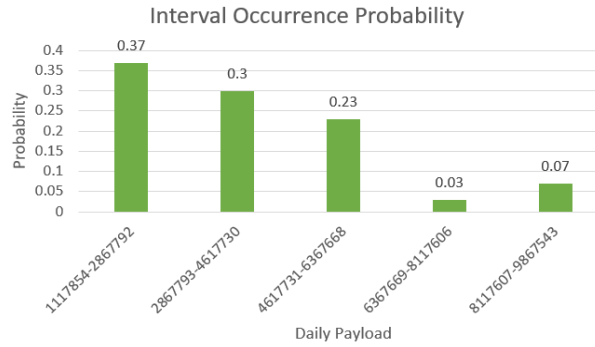


Figure 7. Probability of occurrence

Table 5. Samples of the generate random numbers

S/N	Days	Week Day	Time (Hrs)	Random 1	Random 2	Random 3	...	Random 50
1	Day 1	Thursday	24	0.6702	0.1019	0.4057	...	0.1116
2	Day 2	Friday	24	0.2243	0.4852	0.4346	...	0.8552
3	Day 3	Saturday	24	0.4020	0.7602	0.2864	...	0.3283
4	Day 4	Sunday	24	0.1769	0.5001	0.5555	...	0.1829
5	Day 5	Monday	24	0.5502	0.5569	0.1635	...	0.5484
6	Day 6	Tuesday	24	0.1729	0.9062	0.9319	...	0.8120
7	Day 7	Wednesday	24	0.6229	0.3172	0.9256	...	0.9962
8	Day 8	Thursday	24	0.5303	0.2159	0.1234	...	0.5458
9	Day 9	Friday	24	0.8654	0.9977	0.3652	...	0.2649
10	Day10	Saturday	24	0.7962	0.5698	0.3663	...	0.6757
11	Day 11	Sunday	24	0.4253	0.9379	0.8040	...	0.8891
12	Day 12	Monday	24	0.1687	0.4318	0.5697	...	0.0062
13	Day 13	Tuesday	24	0.0282	0.2373	0.7316	...	0.0058
14	Day 14	Wednesday	24	0.7120	0.9510	0.3111	...	0.5161
15	Day 15	Thursday	24	0.8771	0.5661	0.9999	...	0.9533
16	Day 16	Friday	24	0.4945	0.5719	0.9920	...	0.3387
17	Day 17	Saturday	24	0.2653	0.3188	0.5350	...	0.9216
18	Day 18	Sunday	24	0.1892	0.1252	0.4569	...	0.2023
19	Day 19	Monday	24	0.1014	0.2837	0.4123	...	0.9313
20	Day 20	Tuesday	24	0.8929	0.6781	0.7934	...	0.3061
21	Day 21	Wednesday	24	0.4556	0.6819	0.1318	...	0.8733
22	Day 22	Thursday	24	0.3782	0.2718	0.4887	...	0.3610
23	Day 23	Friday	24	0.8700	0.5190	0.9949	...	0.8373
24	Day 24	Saturday	24	0.9646	0.1077	0.4299	...	0.8557
25	Day 25	Sunday	24	0.6944	0.3961	0.8047	...	0.4908
26	Day 26	Monday	24	0.0338	0.3254	0.5172	...	0.7945
27	Day 27	Tuesday	24	0.7765	0.2509	0.1982	...	0.4346
28	Day 28	Wednesday	24	0.9599	0.7262	0.3101	...	0.3168
29	Day 29	Thursday	24	0.5692	0.2861	0.5674	...	0.2807
30	Day 30	Friday	24	0.5677	0.2291	0.2015	...	0.6084

The probability intervals (upper and lower bound intervals) were calculated using the cumulative probability intervals obtained from the previous table. This probability intervals and its interval values are given in Table 6. The average of the lower and upper bound values is calculated for each of the intervals corresponding to the intervals for which the random numbers were classified. These classified average values are given in Table 7.

The average of each row in Table 7 is computed as shown in the last column of the table. The average value is treated as the Monte Carlo simulation of the payloads for each day for the next thirty schools' days. These Monte Carlo simulated values were then compared with the actual daily payloads as shown in Table 8.

Table 6. Interval values

Interval No.	Probability Intervals
1	0.0000-0.3699
2	0.3700-0.6699
3	0.6700-0.8999
4	0.9000-0.9299
5	0.9299-1.0000

Table 7. Classified average values

S/N	Days	Week Day	Time (Hrs)	Random 1	Random 2	...	Random 50	Average
1	Day 1	Thursday	24	1992823	1412980		1992823	1202766
2	Day 2	Friday	24	3742761	1992823		5492700	4992749
3	Day 3	Saturday	24	7242637	1992823		3742762	5587777
4	Day 4	Sunday	24	3742762	1992823		5492700	4547733
5	Day 5	Monday	24	8992575	1992823		1992823	8742761
6	Day 6	Tuesday	24	3742762	5492700		5492700	5302742
7	Day 7	Wednesday	24	5492700	5492700		1992823	1847758
8	Day 8	Thursday	24	1992823	1992823		5492700	2962746
9	Day 9	Friday	24	1992823	8992575		5492700	4742761
10	Day10	Saturday	24	1992823	1992823		8992575	1777760
11	Day 11	Sunday	24	1992823	3742762		1992823	5672764
12	Day 12	Monday	24	3.742762	3742762		7242638	4742761
13	Day 13	Tuesday	24	3.742762	5492700		3742762	3127748
14	Day 14	Wednesday	24	1992823	5492700		3742762	3337740
15	Day 15	Thursday	24	1992823	1992823		1992823	1337765
16	Day 16	Friday	24	1992823	3742762		1992823	9462746
17	Day 17	Saturday	24	1992823	3742762		5492700	1442736
18	Day 18	Sunday	24	3742762	3742762		1992823	1232744
19	Day 19	Monday	24	3742762	5492700		3742762	1227519
20	Day 20	Tuesday	24	3742762	5492700		3742762	4477760
21	Day 21	Wednesday	24	1992823	1992823		8992575	3337765
22	Day 22	Thursday	24	3742762	5492700		3742762	2402749
23	Day 23	Friday	24	1992823	3742762		8992575	7427772
24	Day 24	Saturday	24	7242638	1992823		1992823	3127748
25	Day 25	Sunday	24	1992823	1992823		3742762	6367906
26	Day 26	Monday	24	5.492610	3742762		5492700	1347758
27	Day 27	Tuesday	24	1992823	8992575		1992823	4462771
28	Day 28	Wednesday	24	1992823	1992823		5492700	3377760
29	Day 29	Thursday	24	5.492610	3742762		3742762	1312759
30	Day 30	Friday	24	1992823	1992823		5492700	4707763

Table 8. Monte Carlo estimates

S/N	Days	Week Day	Time (Hours)	Actual Values	Monte Carlo Estimates
1	Day 1	Thursday	24	1184110.82	1202766
2	Day 2	Friday	24	4910853.06	4992749
3	Day 3	Saturday	24	5978301.75	5587777
4	Day 4	Sunday	24	4644118.73	4547733
5	Day 5	Monday	24	8899905.00	8742761
6	Day 6	Tuesday	24	5476324.33	5302742
7	Day 7	Wednesday	24	1234567.67	1847758
8	Day 8	Thursday	24	3214561.65	2962746
9	Day 9	Friday	24	4567891.76	4742761
10	Day10	Saturday	24	1289085.76	1777760
11	Day 11	Sunday	24	5965301.75	5672764
12	Day 12	Monday	24	4710835.06	4742761
13	Day 13	Tuesday	24	3116451.14	3127748
14	Day 14	Wednesday	24	3011344.68	3337740
15	Day 15	Thursday	24	1156789.10	1337765
16	Day 16	Friday	24	9867543.10	9462746
17	Day 17	Saturday	24	1235471.12	1442736
18	Day 18	Sunday	24	1117854.19	1232744
19	Day 19	Monday	24	1213450.78	1227519
20	Day 20	Tuesday	24	4348721.11	4477760
21	Day 21	Wednesday	24	3216783.10	3337765
22	Day 22	Thursday	24	2315676.10	2402749
23	Day 23	Friday	24	7653293.10	7427772
24	Day 24	Saturday	24	2569791.76	3127748
25	Day 25	Sunday	24	6215643.1	6367906
26	Day 26	Monday	24	1247321.88	1347758
27	Day 27	Tuesday	24	4126543.00	4462771
28	Day 28	Wednesday	24	3354678.01	3377760
29	Day 29	Thursday	24	1123863.11	1312759
30	Day 30	Friday	24	4590345.72	4707763

It can be observed that the two series presented in Table 7, are generated with different samples (t-sample). This is then used to test whether the population's means are equal or not. The graphical view of the actual payloads and the Monte Carlo simulated payload is presented in Figure 8. From Figure 8, it can be observed the forecasted data follows the trend of the actual data very closely. This shows that the developed

Monte Carlo based simulation model is effective in forecasting the payload internet usage of the study campus area network. The statistical data used for this study was generated for 50 users for 30 school days. On average, the total amount of data required to meet the network demand of the user in a month is estimated as 7.64 gigabytes. Therefore, the total amount of data required to cater to the need of 2500 students in the campus is estimated as 382 gigabytes.

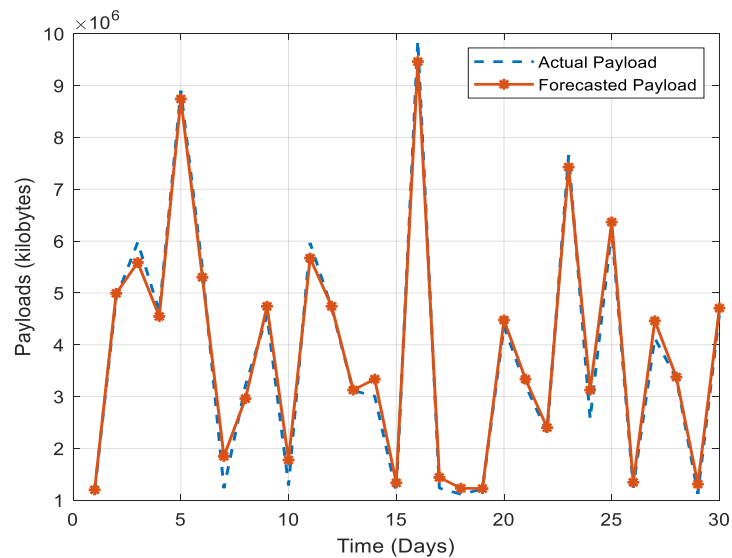


Figure 8. Actual and Monte Carlo forecast

4. CONCLUSION

The aim of this research work which is to forecast user bandwidth utilization on a campus network has been largely met. The research used Nuhu Bamalli Polytechnic, Zaria, Kaduna State, Nigeria as a case study. A network of 50 users concurrently surfing various sites for 30 days was set up with for collecting data. Monte Carlo simulation was used to forecast user bandwidth utilization to plan campus network design and capacity upgrade for 2500 users and beyond.

ACKNOWLEDGEMENTS

The authors of this research work will like to take this opportunity to express their gratitude to the Tertiary Education Trust Fund (TetFund) Institution Based Research for funding this research.

REFERENCES

- [1] E. Harstead and R. Sharpe, "Forecasting of access network bandwidth demands for aggregated subscribers using Monte Carlo methods," *IEEE Communications Magazine*, vol. 53, no. 3, pp. 199-207, 2015.
- [2] B. Mikavica, V. Radojičić, and A. Kostić-Ljubisavljević, "Estimation of optical access network bandwidth demand using Monte Carlo simulation," *International Journal for Traffic and Transport Engineering*, vol. 5, no. 4, pp. 384-399, 2015.
- [3] S. R. Talpur and T. Kechadi, "A Forecasting Model for Data Center Bandwidth Utilization," in *Proceedings of SAI Intelligent Systems Conference*, pp. 315-330, 2016.
- [4] Alaknantha Eswaradass, Xian-He Sun, and Ming Wu, "Network bandwidth predictor (nbp): A system for online network performance forecasting," *Sixth IEEE International Symposium on Cluster Computing and the Grid, CCGRID 06*, vol. 1, pp. 1-4, 2006.
- [5] B. Krithikaivasan, K. Deka, and D. Medhi, "Adaptive Bandwidth Provisioning based on Discrete Temporal Network Measurements", in *IEEE INFOCOM 04*, Hong Kong, China, pp. 1786-1796, 2004.
- [6] C. Xiang, P. Qu, and X. Qu, "Network Traffic Prediction Based on MKSVR," *Journal of Information & Computational Science*, pp. 3185-3197, 2015.
- [7] G. Booker, *et al.*, "Efficient availability evaluation for transport backbone networks," in *Proceedings of International Conference on Optical Network Design and Modeling (ONDM)*, pp. 1-6, 2008. Doi: 10.1109/ONDM.2008.4578386.
- [8] Y. Song and F. A. Kuipers, "Traffic Uncertainty Models in Network Planning," *IEEE Communications Magazine*, vol. 52, no. 2, pp. 172-177, 2014. Doi: 10.1109/MCOM.2014.6736759.

- [9] W. Yoo and A. Sim, "Network bandwidth utilization forecast model on high bandwidth networks," in *2015 International Conference on Computing, Networking and Communications (ICNC)*, pp. 494-498, 2015.
- [10] N. Rana, K. P. Bhandari, and S. J. Shrestha, "Network Bandwidth Utilization Prediction Based on Observed SNMP Data," *Journal of the Institute of Engineering*, vol. 13, no. 1, pp. 160-168, 2017.
- [11] S. Arora and B. S. Brinkman, "A randomized online algorithm for bandwidth utilization," *Journal of Scheduling*, vol. 7, no. 3, pp.187-194, 2004.
- [12] D. N. Thaba, "A Framework for optimizing internet bandwidth utilization a Kenyan perspective," Thesis, Strathmore University, 2008. [Online]. Available: <https://su-plus.strathmore.edu/handle/11071/1477>
- [13] M. E. Ekpenyong and P. J. Udoh, "Modeling the Effect of Bandwidth Allocation on Network Performance," *Science World Journal*, vol. 9, no. 4, pp. 12-22, 2014.
- [14] L. Zhao, *et al.*, "A Filtering Mechanism to Reduce Network Bandwidth Utilization of Transaction Execution," *ACM Transactions on Architecture and Code Optimization (TACO)*, vol. 12, no. 4, pp. 1-26, 2016.
- [15] R. F. Reale, W. Neto, and J. S. Martins, "AllocTC-sharing: A new bandwidth allocation model for DS-TE networks," in *2011 7th Latin American Network Operations and Management Symposium*, pp. 1-4, 2011.
- [16] S. M. Hasan, M. A. Sahib, A. T. Namel, "Bandwidth Utilization Prediction in LAN Network Using Time Series Modeling," *Iraqi journal of Computers, Communication, Control, and Systems Engineering*, vol. 19, no. 2, pp. 78-89, 2019.
- [17] Y. Li, *et al.*, "Optimization of Bandwidth Utilization in Data Center Network with SDN," in *2017 2nd International Conference on Automation, Mechanical Control and Computational Engineering (AMCCE 2017)*, 2017.
- [18] E. Eldesouky, *et al.*, "A Hybrid Cooperative Model for Bandwidth Utilization in Vehicular Ad hoc Networks Based on Game Theory," *International Journal of Control and Automation*, vol. 7, no. 12, pp. 177-188, 2014.
- [19] A. Johnson, "Modeling, Implementation, and Evaluation of IP Network Bandwidth Measurement Methods," Doctoral thesis, Institutionen för datavetenskap och Elektronik, 2007.
- [20] R. K. Paredes and A. A. Hernandez, "Designing an Adaptive Bandwidth Management for Higher Education Institutions," *International Journal of Computing Sciences Research*, vol. 2, no. 1, pp. 17-35, 2018.
- [21] M. Kassim, *et al.*, "Bandwidth Control Algorithm on YouTube Video Traffic in Broadband Network," *Journal of Telecommunication, Electronic and Computer Engineering (JTEC)*, vol. 10, no. 1-5, pp. 151-156, 2018.
- [22] M. Kassim, M. Ismail, and M. I. Yusof, "A New Adaptive Throughput Policy Algorithm on Campus Ip-Based Network Internet Traffic," *Journal of Theoretical and Applied Information Technology*, vol. 71, no. 2, pp. 205-214, 2015.
- [23] O. M. Olanrewaju, "The Modeling and Simulation of Wireless Campus Network," *International Journal of Computer Science & Information Security*, vol. 16, no. 9, 2018.
- [24] L. Chitanana, and D. W. Govender, "Bandwidth management in the era of brings your own device," *The Electronic Journal of Information Systems in Developing Countries*, vol. 68, no. 1, pp. 1-14, 2015.
- [25] E. A. Noughabi, B. H. Far, and B. Raahemi, "Predicting students' behavioral patterns in university networks for efficient bandwidth allocation: A hybrid data mining method," in *IEEE 17th International Conference on Information Reuse and Integration (IRI)*, Pittsburgh, PA, USA, 2016. Doi:10.1109/iri.2016.21.

BIOGRAPHIES OF AUTHORS



Haruna Bege is a lecturer at the department of Computer Engineering technology, Nuhu Bamalli Polytechnic Zaria undergoing his Meng. Electronics and Communications Engineering at the Nigerian Defence Academy, Kaduna. He obtained his Bachelor's Degree in Electrical/Electronic Engineering from Abubakar Tafawa Balewa University, Bauchi, Nigeria. His research interest is in fields of electronics, communication systems and computer networks. He is affiliated with Nigeria society of Engineers



Aminu Yusuf Zubairu is a lecturer in the department of Computer Engineering Technology Nuhu Bamalli Polytechnic Zaria with and Msc Control and Instrumentation from the University of Derby, United Kingdom. He obtained his bachelor's degree from Ahmadu Bello University Zaria in Electrical Engineering. His research interest is in fields of electronics, control systems, computer technology and artificial intelligence. He is affiliated with the Council for the Regulations of Engineers in Nigeria