

Developing a mathematical model for predicting ultimate tensile strength to identify optimal machining parameters

Kancheepuram Thirumal Thilagham¹, Lekshmy Premachandran Ladha², Anand Prakash Tiwary³,
Munde Kashinath Haribhau⁴, Darade Pradipkumar Dudhajirao⁵, Shailseh Ranjan Kumar⁶

¹Department of Metallurgical Engineering, Government College of Engineering, Kannur, India

²Department of Computer Science and Engineering, LBS Institute of Technology for Women, Thiruvananthapuram, India

³Department of Mechanical Engineering, Government Polytechnic Gulzarbagh, Bihar, India

⁴Department of Mechanical Engineering, Anantrao Pawar College of Engineering and Research Parvati, Pune, India

⁵Department of Mechanical Engineering, Sinhgad Institute of Technology and Science Narhe, Pune, India

⁶Department of Mechanical Engineering, Motihari College of Engineering, Motihari, India

Article Info

Article history:

Received May 7, 2024

Revised Jul 30, 2024

Accepted Aug 6, 2024

Keywords:

AA2014-T87

AA6082-T6

Evolved wild horse

Friction stir welding

Optimization

Ultimate tensile strength

ABSTRACT

Identifying the ultimate tensile strength (UTS) for friction stir welded joints between AA6082-T6 and AA2014-T87 is crucial for ensuring material compatibility, optimizing welding parameters, and assessing mechanical performance. This information helps engineers design safer, more reliable structures and optimize the welding process, improving the utilization of these aluminum alloys in high-performance applications. Traditional methods for identifying UTS face challenges such as material variability, precise experimental setup, the influence of welding parameters, and are time-consuming and costly. This research aims to develop a mathematical model capable of identifying the UTS based on given inputs, specifically optimal tilt angle, travel speed, and rotational speed. The developed model is further utilized to identify the optimal machining parameters. Processing this manually or through trial and error is time-consuming and complex, highlighting the need to incorporate optimization techniques to determine the optimal parameters efficiently. This research involves several optimization techniques, among which the evolved wild horse optimization (EWHO) performs better, achieving a mean square error of 0.45. This is superior performance compared to other optimization techniques and employed prediction models. This approach saves time, reduces complexity, and enhances precision compared to manual or trial-and-error methods, ultimately improving the efficiency and reliability of material processing.

This is an open access article under the [CC BY-SA](https://creativecommons.org/licenses/by-sa/4.0/) license.



Corresponding Author:

Kancheepuram Thirumal Thilagham

Department of Metallurgical Engineering, Government College of Engineering

Kannur, India

Email: thilaghaammet@gmail.com

1. INTRODUCTION

Friction stir welding (FSW) is a solid-state joining process that has transformed industries such as aerospace, automotive, shipbuilding, and railways since its invention in 1991 [1]. Unlike traditional welding methods [2], FSW uses a rotating tool to generate frictional heat, softening materials without melting them, resulting in a solid-state bond with fewer defects and better mechanical properties [3], [4]. Aluminum alloys AA6082-T6 and AA2014-T87 are popular for their strength-to-weight ratio, corrosion resistance, and machinability [5], [6], but welding these dissimilar alloys presents challenges in material compatibility, process optimization, and mechanical performance assessment [7]. Addressing differences in chemical

composition and physical properties is crucial for bonding quality [8], [9], and precise control over welding parameters is needed for optimal joint quality [10]. Traditional methods for determining ultimate tensile strength (UTS) and optimal welding parameters are time-consuming and costly [11], [12], and experimental setups must be precise to account for thermal effects and residual stresses [13].

As an outcome, creating a reliable and effective model to determine the FSW UTS is crucial [14]. The goal of this research is to create a mathematical model that can predict UTS based on rotational speed, tilt angle, and travel speed [15], [16]. To do this, optimization techniques like genetic algorithm (GA) [17], evolutionary algorithm (EA) [18], particle swarm optimization (PSO) [19], wild horse optimization (WHO) [20], and enhanced wild horse optimization (EWHO) will be utilized. These techniques are evaluated using artificial intelligence-based models like artificial neural network (ANN) [21], radial basis function neural network (RBNN) [22], and k-nearest neighbors (KNN) [23]. The paper is structured with a literature review in section 2, methodology in section 3, model performance evaluation in section 4, and conclusions in section 5.

2. LITERATURE REVIEW

Thilagham *et al.* [24] suggested process parameters for welding AA6082-T6 and AA2014-T87, evaluating rotational speed, traversal speed, and tilt angle using the L9 orthogonal array. Jaroslaw Krzywanski [25] developed a modeling tool for predicting heat transfer coefficients in fluidized bed boilers, emphasizing the practical significance of such predictions. Krishnan *et al.* [26] highlighted the impact of process variables on FSW quality and created a mathematical model to forecast tensile strength using ANN. Dinkar and Deep [27] proposed improvements to the ant lion optimizer using a Cauchy distribution-based random walk and opposition-based learning to overcome local optima and slow convergence. Jamalain *et al.* [28] examined powder-assisted multi-pass FSW of AA5086-H34 joints, training an ANN to model FSW parameters and joint characteristics. Sayeed *et al.* [29] enhanced solar power generation forecasting by integrating optimization techniques into ANN models, achieving 97.2% prediction accuracy with their evolution of cub to predator technique, surpassing traditional methods.

3. PROPOSED METHODOLOGY

AA6082 and AA2014 are commonly utilized in aerospace and automotive applications for their high structural strength and excellent casting characteristics. In this study, two rolled aluminum plates (100×50×6 mm) were clamped and welded using a 3-T/HYD friction stir machine, with AA6082-T6 on the advancing side and AA2014-T87 on the retreating side. The welded plates were then cut into 100×100×6 mm specimens and tested for tensile properties. The research aims to develop a mathematical model using a sigmoidal function and involves fuzzy logic control (FLC) for generating the necessary data. The study also integrates EWHO techniques to identify optimal weights for predicting the UTS, incorporating oppositional-based learning and the Cauchy distribution to enhance the EWHO algorithm. Table 1 display the chemical analysis outcomes for the base materials.

Table 1. Chemical analysis results of base materials

Elements (wt %)	Si %	Fe %	Cu %	Mn %	Mg %	Cr %	Zn %	Ti %	Al %
AA2014	0.681	0.193	4.171	0.639	0.597	0.003	0.076	0.051	Balance
AA6082	1.16	0.169	0.035	0.54	0.831	0.005	0.002	0.017	Balance

3.1. Fuzzy logic controller

fuzzy logic control (FLC) is a key research area involving fuzzy set theory, reasoning, and logic [30]. It effectively addresses complex problems without needing a deep understanding of the underlying dynamics, using a knowledge base and fuzzy inference rules [31]. This research uses FLC to generate datasets for developing a mathematical model, mimicking human reasoning through rule-based implementation and handling uncertainty. Figure 1 shows the steps in designing an FLC.

3.2. Mathematical modelling

The primary purpose of developing a mathematical model is to predict the UTS for friction stir welded AA6082-T6 and AA2014-T87 alloys. This model aims to reduce the computational cost and time involved in experimentation. This research considers the sigmoidal function as a blind equation and tunes the mathematical model using the EWHO by adjusting the weights in the model. The developed mathematical model is expressed in (1) to (2). Developing this mathematical model through manual derivation and

trial-and-error processes is time-consuming and complex. Therefore, integrating optimization techniques is essential to identify the optimal weights in the mathematical model, enabling effective prediction of the UTS.

$$f(x_1) = \frac{1}{1+\exp^{-x_1}} = \frac{1}{\frac{1+\exp(x_1)}{\exp(x_1)}} = \frac{1}{\frac{1+\exp(x_1)}{\exp(x_1)}} = \frac{\exp(x_1)}{1+\exp(x_1)} \quad (1)$$

$$F_i = \sum_{j=1}^{NH} \zeta_i * \frac{\exp(\sum_{i=1}^{NI} X_i \eta_i)}{1+\exp(\sum_{i=1}^{NI} X_i \eta_i)} \quad (2)$$

x_1 is input vector, WHO is chosen for optimal weights in a mathematical model due to its balance of exploration and exploitation, adaptability to complex problems, and superior performance over other techniques like GA and PSO.

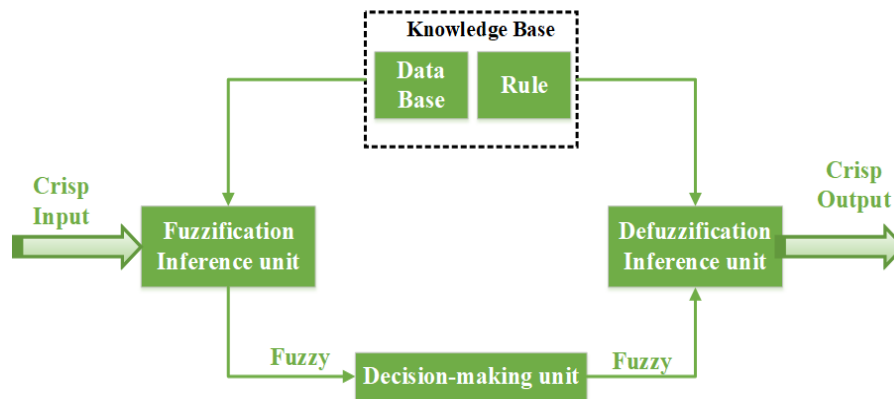


Figure 1. Fuzzy logic controller

3.3. Evolved wild horse optimization

The WHO is a mathematical model development tool that balances exploration and exploitation. However, it faces issues like premature convergence and computational intensity. The EWHO integrates opposition-based learning and the Cauchy distribution to improve its effectiveness. The EWHO process includes initial population generation, horse group organization, leader guidance, and optimal weight selection. Figure 2 depicts the EWHO flowchart.

3.3.1. Creating an initial population

Every optimization algorithm shares the same fundamental structure. The algorithm starts with $(\vec{x}) = \{\vec{x}_1, \vec{x}_2, \dots, \vec{x}_n\}$ an initial random population. The target function repeatedly evaluates this random population, and a target value is determined $(\vec{O}) = \{O_1, O_2, \dots, O_n\}$. A set of guidelines that form the basis of an optimization technique also helped. There is no assurance that a solution will be found in one run because population-based optimization approaches search for the ideal number of optimization issues. However, the likelihood of discovering the best global solution rises with enough random solutions and optimization stages (iteration). We first divide this initial population into a number of categories. If N is the number of members of the population, the number of groups is $G = [N \times PS]$. The PS, which we consider a control parameter for the suggested algorithm, is the proportion of stallions in the whole population. Thus, the number of groups determines the leader G (the stallion), and the remaining members $(N - G)$ are distributed equally among these groups. The algorithm first selects group leaders at random, and then selects them based on fitness, or the best fitness function, among the group members.

3.3.2. Opposition based solution

Considering opposition is more advantageous than creating random alternatives because an opposition candidate is usually closer to the answer. Running the current solution and its inverse concurrently can provide a better approximation, as an opposing pollen solution is more likely to be closer to the optimum than a random pollen solution.

$$OX_{i,G}^j = x_i + y_i - X_{i,G}^j \tag{3}$$

In (3), OX is the opposition-based solution and X refers randomly generated solution and x_i, y_i refers the minimum and the maximum values respectively. Generating both random and opposition-based solutions enhances solution diversity and improves the chances of finding the global optimum. These solutions are evaluated for effectiveness, leading to better optimization results by combining random exploration with systematic opposition.

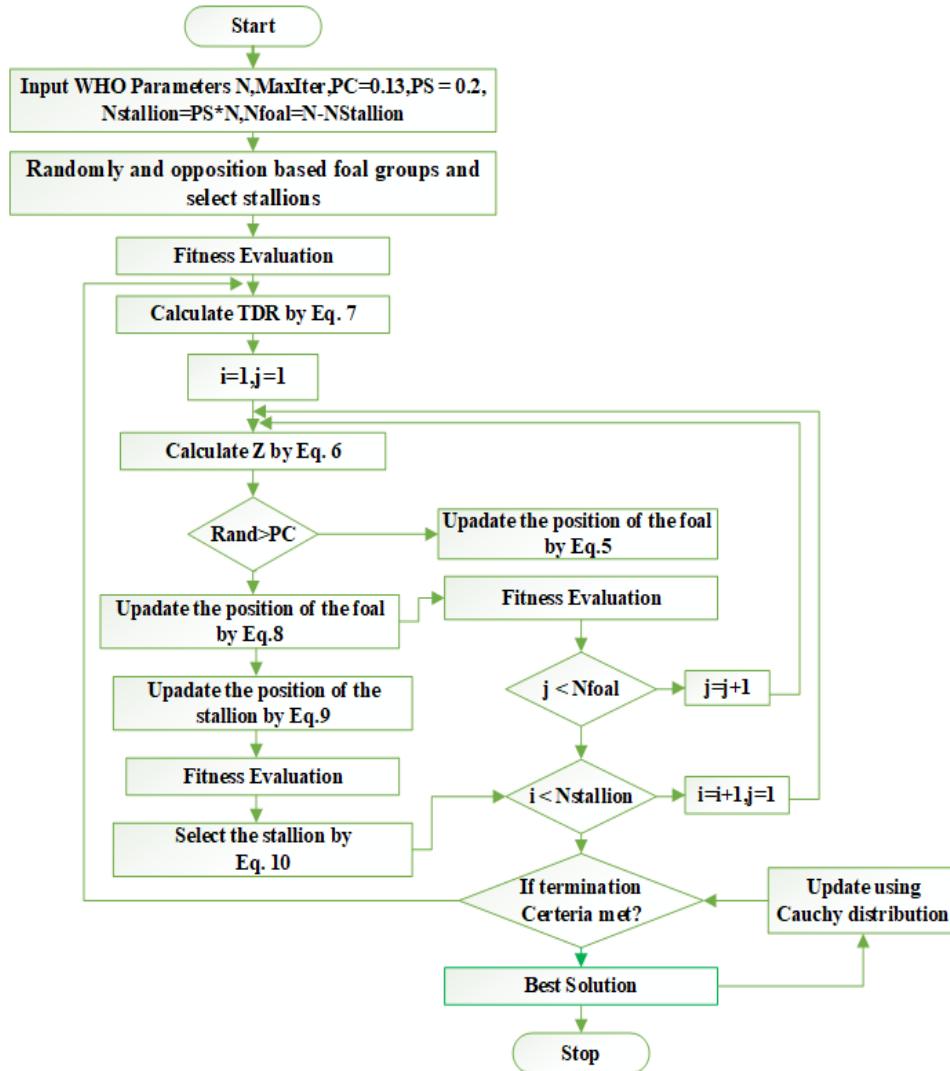


Figure 2. Flow chart of evolved wild horse optimization

3.3.3. Fitness0function

The fitness approach to evaluate how well a solution performs in comparison to the overall amount of validation data. In (4), N refers number of data points; x_i refers observed values; \hat{x}_i refers predicted values.

$$Mean\ Squared\ Error = \frac{1}{N} \sum_{i=1}^N (x_i - \hat{x}_i)^2 \tag{4}$$

3.3.4. Grazing behavior

Most foals graze in the vicinity of their group, with the stallion marking the hub of the grazing area. The grazing behavior is simulated by (5), which leads the group members to move and search at different distances from the leader.

$$\overline{X}_{i,G}^j = 2F \cos(2\pi RF) \times (Stallion^j - X_{i,G}^j) + Stallion^j \quad (5)$$

$X_{i,G}^j$ represents the current position of a group member, while $Stallion^j$ is the stallion's position. A random number R in the range $[-2, 2]$ causes grazing at different angles around the leader. The COS function combining π (3.14) and R results in movement in various radius, determining the new position $\overline{X}_{i,G}^j$ of the group member when grazing.

$$P = \vec{R}_1 < TDR; IDX = (P == 0); F = R_2 \theta IDX + \vec{R}_3 \theta (\sim IDX) \quad (6)$$

where (6), P is a vector consisting of 0 and 1 equal to the dimensions of the problem, \vec{R}_1 and \vec{R}_3 are random vectors with uniform distribution in the range $[0, 1]$, R_2 is a random number with uniform distribution in the range $[0, 1]$, IDX indexes of the random vector \vec{R}_1 returns that satisfy the condition $(P == 0)$. TDR is an adaptive parameter that starts with a value of 1 and decreases during the execution of the algorithm according to (7) and at the end of the execution of the algorithm reaches 0.

$$TDR = 1 - iter \times \left(\frac{1}{max\ iter} \right) \quad (7)$$

where in (7) $iter$ is the current iteration and $max\ iter$ represents the algorithm's maximum number of iterations.

3.3.5. Horse mating behavior

Horses exhibit a unique behavior where foals leave their family group before breeding to prevent inbreeding. Male foals join single groups before puberty, while females join different groups after puberty. This behavior is modeled using (8).

$$X_{G,k}^p = Crossover(X_{G,i}^q, X_{G,j}^z) \quad i \neq j \neq k, p = q = end, \quad (8)$$

Crossover = Mean

where $X_{G,k}^p$ is the position of horse p from group k and leave the group and gives its place to a horse whose parents are horses that have to leave group i and j and have reached puberty. They have no family relationship and have mated and reproduced. $X_{G,i}^q$ the position of the foal q is from group i , which is a departure from the group, and after reaching the age of puberty, it mated with the horse z with the position $X_{G,j}^z$, which leaves group j .

3.3.6. Group leadership

Group leaders must lead their members to a central location called the water hole. Multiple groups approach and compete for it, with only the dominant group allowed to use it. Leaders guide their groups to the water hole, use it if dominant, or move away if another group is dominant. Equations (9) and (10) are proposed to manage this approach and distance.

$$\overline{Stallion}_{G_i} = \begin{cases} 2F \cos(2\pi RF) \times (WH - Stallion_{G_i}) + WH & \text{if } R_3 > 0.5 \\ 2F \cos(2\pi RF) \times (WH - Stallion_{G_i}) - WH & \text{if } R_3 \leq 0.5 \end{cases} \quad (9)$$

$$Stallion_{G_i} = \begin{cases} X_{G,i} & \text{if } \cos t(X_{G_i}) < \cos t(Stallion_{G_i}) \\ Stallion_{G_i} & \text{if } \cos t(X_{G_i}) > \cos t(Stallion_{G_i}) \end{cases} \quad (10)$$

where, $\overline{Stallion}_{G_i}$ is the next position of the leader of the i group, WH is the position of the water hole, $Stallion_{G_i}$ is the current position of the leader of the i group.

3.3.7. Exchange and selection of leaders

We first select the leaders at random in order to preserve the randomness of the algorithm. Leaders are selected based on fitness later in the algorithm. If a member of the group is physically fitter than the leader, the leader's and the corresponding member's positions will change according to (10).

3.3.8. Cauchy distribution

The Cauchy distribution enhances traditional WHO strategy by introducing larger steps, increasing search diversity, and balancing exploration and exploitation, leading to robust optimization and reliable convergence to optimal solutions. Equation (11) provides a definition for the Cauchy distribution function.

$$F(x; a, b) = \frac{1}{\pi} \arctan\left(\frac{x-a}{b}\right) + \frac{1}{2} \tag{11}$$

Experimental analysis identifies location parameter and scale parameter b between 0 and 1, after multiple experiments with varying values.

3. RESULTS AND DISCUSSION

The mathematical model aims to predict UTS for given machining parameters and is evaluated using MSE, RMSE, R^2 , and MAE. Experimental and model-predicted UTS are compared, showing EWHO with the smallest average difference (1.0 MPa) and highest accuracy. WHO and PSO also show good accuracy, while GA and EA are moderately accurate. ANN, RBNN, and KNN have lower precision. EWHO's superior performance is attributed to its advanced mechanisms that enhance solution diversity and avoid local optima, making it robust and reliable for predicting UTS. Figure 3 illustrates the prediction performance of the employed techniques.

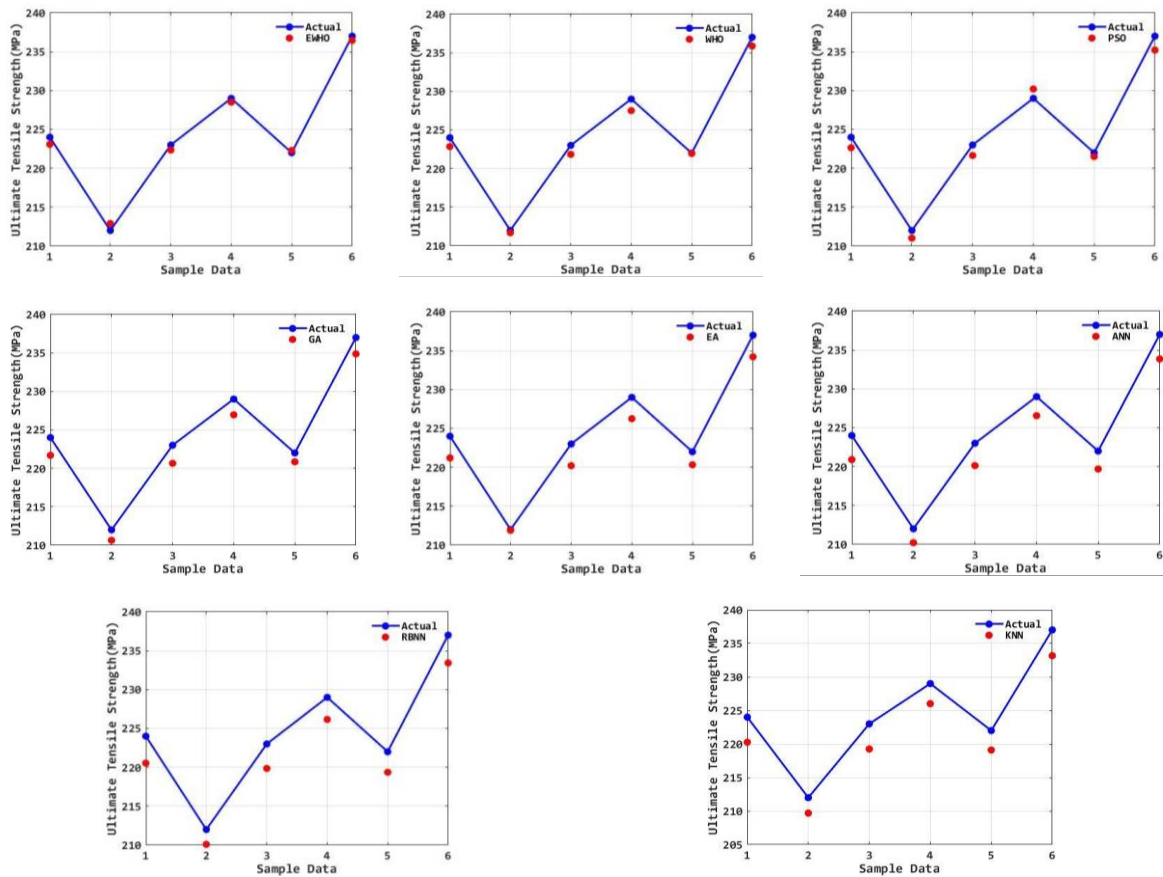


Figure 3. Predicting performance of employed techniques

3.1. Error measures

Error measures like MSE, RMSE, R^2 , and MAE are crucial for evaluating a mathematical model's performance in predicting UTS. Figure 4 show that EWHO outperforms other techniques, with the lowest MSE, RMSE, highest R^2 , and MAE, indicating superior accuracy and precision. WHO and PSO also perform well, while ANN, RBNN, and KNN have higher errors and lower reliability.

3.2. Convergence graph

A convergence graph shows the progress of optimization algorithms over time, comparing efficiency, stability, and convergence rates. EWHO shows the fastest convergence, achieving the lowest error value. WHO reduces error but at a slower rate, while PSO has a moderate rate. GA converges slowly, while EA has the slowest and least stable convergence. Figure 5 illustrates the MSE over iterations for various optimization techniques.

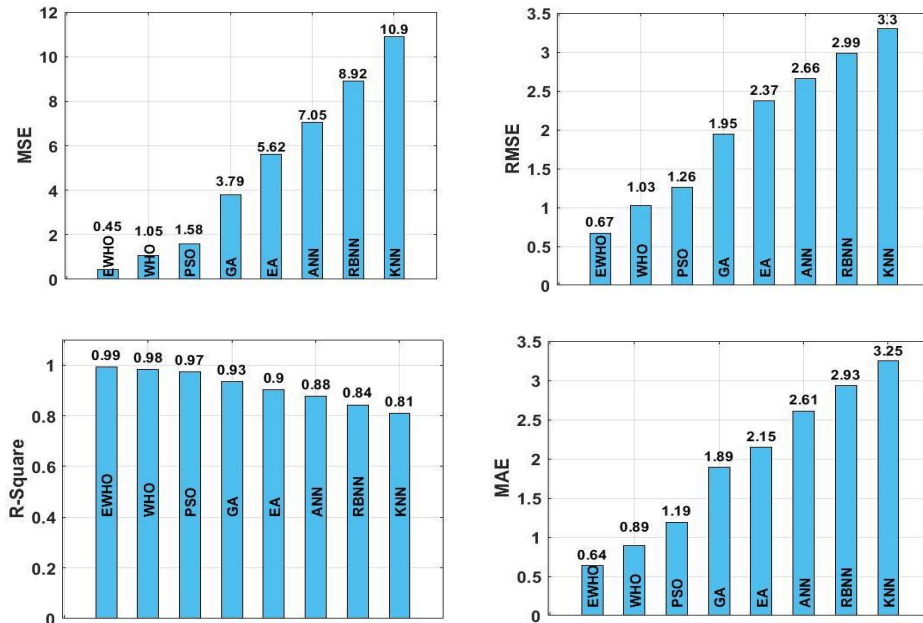


Figure 4. Performance of employed techniques for error measures

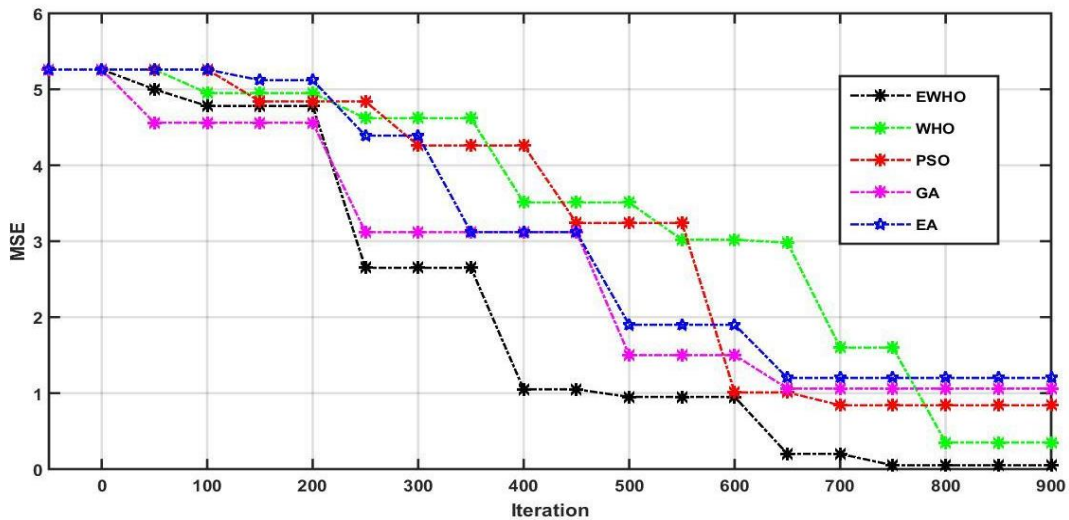


Figure 5. Convergence graph

4. CONCLUSION

Developing the mathematical model has been accomplished with EWHO-configured weights. As a result, the proposed approach reveals lower error values of 0.45, 0.67, and 0.64 from MSE, RMSE, and MAE, respectively. At the same time, the proposed model attains an R2 value of 0.99. The integration of opposition-based learning and the Cauchy distribution strategy, in conjunction with the traditional WHO

approach, enhances the performance of EWHO in developing the mathematical model to predict the UTS effectively. The adequately trained mathematical model results indicate that it is much more robust and accurate in estimating the UTS when compared with the other optimization-configured and traditional prediction models. In the future, this research will aim to identify optimal tilt angle, travel speed, and rotational speed by using this developed mathematical model to predict UTS.




REFERENCE

- [1] N. S. Khemnar, Y. R. Gunjal, V. S. Gadakh, and A. S. Mulay, "Friction stir welding of dissimilar metals," *Friction Stir Welding and Processing*. Wiley, pp. 93–107, Mar. 2024, doi: 10.1002/9781394169467.ch7.
- [2] A. Arumugam and A. Pramanik, "A review on the recent trends in forming composite joints using spot welding variants," *Journal of Composites Science*, vol. 8, no. 4, Apr. 2024, doi: 10.3390/jcs8040155.
- [3] M. Akbari, P. Asadi, and T. Sadowski, "A review on friction stir welding/processing: numerical modeling," *Materials*, vol. 16, no. 17, 2023, doi: 10.3390/ma16175890.
- [4] Y. Fu *et al.*, "Surface defects reinforced polymer-ceramic interfacial anchoring for high-rate flexible solid-state batteries," *Advanced Functional Materials*, vol. 33, no. 10, Jan. 2023, doi: 10.1002/adfm.202210845.
- [5] Y. Sun, "The use of aluminum alloys in structures: review and outlook," *Structures*, vol. 57, Nov. 2023, doi: 10.1016/j.istruc.2023.105290.
- [6] M. Y. Khalid, R. Umer, and K. A. Khan, "Review of recent trends and developments in aluminium 7075 alloy and its metal matrix composites (MMCs) for aircraft applications," *Results in Engineering*, vol. 20, Dec. 2023, doi: 10.1016/j.rineng.2023.101372.
- [7] S. Kilic, F. Ozturk, and M. F. Demirdogen, "A comprehensive literature review on friction stir welding: Process parameters, joint integrity, and mechanical properties," *Journal of Engineering Research*, Sep. 2023, doi: 10.1016/j.jer.2023.09.005.
- [8] D. Labus Zlatanovic, J. Pierre Bergmann, S. Balos, J. Hildebrand, M. Bojanic-Sejat, and S. Goel, "Effect of surface oxide layers in solid-state welding of aluminium alloys – review," *Science and Technology of Welding and Joining*, vol. 28, no. 5, pp. 331–351, Jul. 2023, doi: 10.1080/13621718.2023.2165603.
- [9] M. Norouzian, M. Amne Elahi, and P. Plapper, "A review: suppression of the solidification cracks in the laser welding process by controlling the grain structure and chemical compositions," *Journal of Advanced Joining Processes*, vol. 7, Jun. 2023, doi: 10.1016/j.jajp.2023.100139.
- [10] S. Kumar *et al.*, "Machine learning techniques in additive manufacturing: a state of the art review on design, processes and production control," *Journal of Intelligent Manufacturing*, vol. 34, no. 1, pp. 21–55, Oct. 2022, doi: 10.1007/s10845-022-02029-5.
- [11] K. Kalita, D. Burande, R. K. Ghadai, and S. Chakraborty, "Finite element modelling, predictive modelling and optimization of metal inert gas, tungsten inert gas and friction stir welding processes: a comprehensive review," *Archives of Computational Methods in Engineering*, vol. 30, no. 1, pp. 271–299, Aug. 2022, doi: 10.1007/s11831-022-09797-6.
- [12] A. K. Mengistic and T. M. Bogale, "Development of automatic orbital pipe MIG welding system and process parameters' optimization of AISI 1020 mild steel pipe using hybrid artificial neural network and genetic algorithm," *The International Journal of Advanced Manufacturing Technology*, vol. 128, no. 5–6, pp. 2013–2028, Aug. 2023, doi: 10.1007/s00170-023-11796-1.
- [13] W.-L. Lu, J.-L. Sun, H. Su, L.-J. Chen, and Y.-Z. Zhou, "Experimental research and numerical analysis of welding residual stress of butt welded joint of thick steel plate," *Case Studies in Construction Materials*, vol. 18, Jul. 2023, doi: 10.1016/j.cscm.2023.e01991.
- [14] S. Matitopanum, R. Pitakaso, K. Sethanan, T. Srichok, and P. Chokanat, "Prediction of the ultimate tensile strength (UTS) of asymmetric friction stir welding using ensemble machine learning methods," *Processes*, vol. 11, no. 2, Jan. 2023, doi: 10.3390/pr11020391.
- [15] A. Kumar, P. Gahlot, A. Kumar, and R. K. Phanden, "A state-of-the-art literature review on friction stir welding of 7075-aluminium alloy for tool geometry selection, environmental parameter and mathematical modelling perspective," *International Journal on Interactive Design and Manufacturing (IJIDeM)*, Jun. 2024, doi: 10.1007/s12008-024-01922-y.
- [16] G. Ghangas, S. Singhal, S. Dixit, V. Goyat, and S. Kadiyan, "Mathematical modeling and optimization of friction stir welding process parameters for armor-grade aluminium alloy," *International Journal on Interactive Design and Manufacturing (IJIDeM)*, vol. 17, no. 5, pp. 2323–2340, Aug. 2022, doi: 10.1007/s12008-022-01000-1.
- [17] C. He, Y. Zhang, D. Gong, and X. Ji, "A review of surrogate-assisted evolutionary algorithms for expensive optimization problems," *Expert Systems with Applications*, vol. 217, May 2023, doi: 10.1016/j.eswa.2022.119495.
- [18] B. Alhijawi and A. Awajan, "Genetic algorithms: theory, genetic operators, solutions, and applications," *Evolutionary Intelligence*, vol. 17, no. 3, pp. 1245–1256, Feb. 2023, doi: 10.1007/s12065-023-00822-6.
- [19] J. Nayak, H. Swapnarekha, B. Naik, G. Dhiman, and S. Vimal, "25 years of particle swarm optimization: Flourishing voyage of two decades," *Archives of Computational Methods in Engineering*, vol. 30, no. 3, pp. 1663–1725, Dec. 2022, doi: 10.1007/s11831-022-09849-x.
- [20] C. Zeng *et al.*, "Coverage optimization of heterogeneous wireless sensor network based on improved wild horse optimizer," *Biomimetics*, vol. 8, no. 1, Feb. 2023, doi: 10.3390/biomimetics8010070.
- [21] I. Pantic, J. Paunovic, J. Cumic, S. Valjarevic, G. A. Petroianu, and P. R. Corridon, "Artificial neural networks in contemporary toxicology research," *Chemico-Biological Interactions*, vol. 369, Jan. 2023, doi: 10.1016/j.cbi.2022.110269.
- [22] J. Wu, L. Fang, G. Dong, and M. Lin, "State of health estimation of lithium-ion battery with improved radial basis function neural network," *Energy*, vol. 262, Jan. 2023, doi: 10.1016/j.energy.2022.125380.
- [23] A. X. Wang, S. S. Chukova, and B. P. Nguyen, "Ensemble k-nearest neighbors based on centroid displacement," *Information Sciences*, vol. 629, pp. 313–323, Jun. 2023, doi: 10.1016/j.ins.2023.02.004.
- [24] K. T. Thilagham and S. Muthukumaran, "Process parameter optimization and characterization studies of dissimilar friction stir welded advancing side AA6082-T6 with retreating side AA2014-T87," *Materials Today: Proceedings*, vol. 27, pp. 2513–2519, 2020, doi: 10.1016/j.matpr.2019.09.228.
- [25] J. Krzywanski, "Heat transfer performance in a superheater of an industrial CFBC using fuzzy logic-based methods," *Entropy*, vol. 21, no. 10, Sep. 2019, doi: 10.3390/e21100919.
- [26] M. M. Krishnan, J. Maniraj, R. Deepak, and K. Anganan, "Prediction of optimum welding parameters for FSW of aluminium alloys AA6063 and A319 using RSM and ANN," *Materials Today: Proceedings*, vol. 5, no. 1, pp. 716–723, 2018, doi: 10.1016/j.matpr.2017.11.138.




- [27] S. K. Dinkar and K. Deep, "Opposition-based antlion optimizer using Cauchy distribution and its application to data clustering problem," *Neural Computing and Applications*, vol. 32, no. 11, pp. 6967–6995, Apr. 2019, doi: 10.1007/s00521-019-04174-0.
- [28] H. M. Jamalain, M. T. Eskandar, A. Chamanara, R. Karimzadeh, and R. Yousefian, "An artificial neural network model for multi-pass tool pin varying FSW of AA5086-H34 plates reinforced with Al₂O₃ nanoparticles and optimization for tool design insight," *CIRP Journal of Manufacturing Science and Technology*, vol. 35, pp. 69–79, Nov. 2021, doi: 10.1016/j.cirpj.2021.05.007.
- [29] F. Sayeed, K. R. Ahmed, and S. M. Swamy, "Artificial intelligence based succored power prediction in stand alone PV system," *Australian Journal of Electrical and Electronics Engineering*, pp. 1–14, Apr. 2024, doi: 10.1080/1448837x.2024.2345992.
- [30] E. Korkmaz and A. P. Akgüngör, "A hybrid traffic controller system based on flower pollination algorithm and type-2 fuzzy logic optimized with crow search algorithm for signalized intersections," *Soft Computing*, vol. 28, no. 11–12, pp. 7227–7249, Feb. 2024, doi: 10.1007/s00500-024-09643-w.
- [31] M. V Kadam, H. B. Mahajan, N. J. Uke, and P. R. Futane, "Cybersecurity threats mitigation in internet of vehicles communication system using reliable clustering and routing," *Microprocessors and Microsystems*, vol. 102, Oct. 2023, doi: 10.1016/j.micpro.2023.104926.

BIOGRAPHIES OF AUTHORS






Kancheepuram Thirumal Thilagham    is a senior assistant professor in the Department of Metallurgical Engineering at Government College of Engineering, Salem, with 10 years of teaching experience and a decade of industry experience in welding, quality control, powder metallurgy, and TQM. She graduated from the National Institute of Technology, Tiruchirappalli. Her research interests include welding metallurgy, friction stir welding, and additive manufacturing. She is a life member of the Indian Institute of Metals, Indian Welding Society, and Madras Metallurgical Society. She has guided 14 PG and 16 UG students in industrial and welding projects and has published two SCI and five Scopus articles. She can be contacted at email: thilaghaamm@gmail.com.






Lekshmy Premachandran Ladha    received her Ph.D. in computer science and engineering from the University of Kerala in January 2022. She earned her bachelor's degree in information technology from MS University, Tamil Nadu, in 2004, and her master's degree in computer science and engineering from Karunya Deemed University, Coimbatore, in 2006. She is currently an assistant professor in computer science and engineering at LBS Institute of Technology for Women, Trivandrum, and the University of Kerala since 2008. Her research interests include privacy-preserving data mining, machine learning, deep learning, and big data analytics. She can be contacted at email: lekshmyvinod@gmail.com.






Anand Prakash Tiwary    is the principal and head of the Mechanical Engineering Department at Government Polytechnic Darbhanga, Bihar, India. He holds a B.Tech. in mechanical engineering from NERIST, Arunachal Pradesh, an M.Tech. in energy technology from Tezpur University, Assam, and a Ph.D. in micromachining from Jadavpur University, Kolkata. Dr. Tiwary has served in various roles, including assistant manager at GIAN-NE, IIT Guwahati, associate director and professor at Sikkim Manipal Institute of Technology, and Head of Mechanical Engineering at Government Polytechnic Gulzarbagh, Patna. He has published research in international journals, presented at conferences, and specializes in micromachining and non-conventional machining, supervising Ph.D. scholars and reviewing for peer-reviewed journals. He can be contacted at email: aaptiwary@gmail.com.






Munde Kashinath Haribhau    is a professor in the Mechanical Engineering Department at A.B.M.S.P. Anantrao Pawar College of Engineering and Research, Pune, India. He earned his bachelor's degree in mechanical engineering from Shivaji University, Kolhapur in 2002, followed by a master's degree in design engineering in 2005, and completed his Ph.D. in mechanical engineering at Sant Gadge Baba Amravati University in 2018. His research interests include machines and mechanisms, design engineering, tribology, and vibration control. Dr. Munde has successfully guided two Ph.D. scholars and is currently supervising two more. He is a member of professional organizations such as ISTE, IAAC, and CIIR. Along with his academic duties, he is actively involved in research projects and has made significant contributions to mechanical engineering through his work and publications. He can be contacted at email: kashinnathmunde@gmail.com.



Darade Pradipkumar Dudhajirao    is a professor in the Mechanical Engineering Department at STES, Sinhgad Institute of Technology and Science, Narhe, Pune, India. He earned his bachelor's degree in mechanical engineering from Marathwada University, Aurangabad in 1992, followed by a master's degree in design engineering in 2004, and completed his Ph.D. in mechanical engineering from North Maharashtra University, Jalgaon in 2017. His research focuses on design engineering, tribology, and active vibration control, and he has successfully guided one Ph.D. scholar while currently supervising four more. Dr. Darade has contributed significantly to mechanical engineering through various research projects and numerous publications, and he remains a dedicated member of the academic community at Sinhgad Institute of Technology and Science. He can be contacted at email: daradeepd@gmail.com.



Shailseh Ranjan Kumar    is working as an assistant professor at Motihari College of Engineering, Motihari. His research interests span heat transfer. Much of the work has been on improving the understanding, design, and performance of microchannel heat exchanger, and improving the understanding, design, visualization and performance of natural convection from horizontal plate. He has more than ten publications in international and national journals and conferences. He holds national and international patents. He can be contacted at email: shaileshraanjankumar@gmail.com.