

## A New Design of a CPW-Fed Dual-Band Monopole Antenna for RFID Readers

Ahmed El Hamraoui<sup>1</sup>, EL Hassane Abdelmounim<sup>2</sup>, Jamal Zbitou<sup>3</sup>, Hamid Bennis<sup>4</sup>, Mohamed Latrach<sup>5</sup>

<sup>1,2</sup>ASTI Laboratory, FSTS, Hassan 1<sup>st</sup> University, Settat, Morocco

<sup>3</sup>MEET Laboratory, FSTS, Hassan 1<sup>st</sup> University, Settat, Morocco

<sup>4</sup>TIM Research Team, EST of Meknes, Moulay Ismail University, Meknes, Morocco

<sup>5</sup>Microwave Group, ESEO, Angers, France

---

### Article Info

#### Article history:

Received Oct 12, 2017

Revised Mar 20, 2018

Accepted Mar 28, 2018

#### Keyword:

Antenna

Coplanar waveguide (CPW) fed

Dual-frequency operation

Monopole antenna

RFID

---

### ABSTRACT

This paper comes with a new dual-band planar monopole antenna fed by Coplanar Waveguide (CPW) line designed for RFID readers and it operates at 2.45 GHz, 5.80 GHz. This antenna is designed with reasonable gain, low profile and low cost production. The designed antenna based on theoretical equations is simulated and validated by using ADS from Agilent technologies and CST Microwave Studio electromagnetic solvers. A parametric study of the proposed antenna has been carried out by optimizing some critical parameters. The antenna has a total area of 35×38 mm<sup>2</sup> and mounted on an FR4 substrate with dielectric permittivity constant 4.4 and thickness of 1.6 mm and loss tangent 0.025. The comparison between simulation and measurement results permits to validate the final achieved antenna structure in the desired RFID frequencies bands. Details of the proposed antenna design and both simulated and experimental results are described and discussed.

Copyright © 2018 Institute of Advanced Engineering and Science.  
All rights reserved.

---

### Corresponding Author:

Ahmed EL Hamraoui,

ASTI Laboratory,

Faculty of Science and Techniques

Hassan 1<sup>st</sup> University,

Settat, Morocco.

Email: a.elhamraoui@outlook.fr

---

## 1. INTRODUCTION

Nowadays radiofrequency identification (RFID) has been deployed in a wide range of applications such as logistics, intelligent trace, asset tracking, electronic passports and tale health, for these reasons RFID has become more popular and gained much interest [1], [2]. An RFID system is basically composed of two principal elements; a tag, comprising an antenna and a microchip circuit which is remotely interrogated and supplied by a reader responsible for gathering all the information from the detected tags. The tags use the backscattering modulation technique to communicate their data to the reader based on a magnetic or electromagnetic coupling. The block diagram of an RFID system is illustrated in Figure 1 [3].

Several frequency bands have been assigned to the RFID technology such as the Low frequency (LF, 125,134 kHz) and high-frequency (HF, 13.56 MHz) applications are most matured and worldwide accepted. These applications are based on magnetic flux coupling between the reader's and tag's coils. RFID systems at Ultra-high frequency (UHF, 860; 960 MHz) and microwave (2.4 GHz and 5.2 GHz) offer a communication link at longer distance with high data rates [4].

Recently, monopole antennas have found widespread applications in wireless mobile communication systems such as RFID systems. The CPW is the feeding which side-plane conductor is ground and center strip carries the signal [5]. CPW-fed antennas have many attractive features, such as no soldering

points, easy fabrication and integration with monolithic microwave integrated circuits, and a simplified configuration with a single metallic layer, low cost, wide bandwidth and flexibility towards multiband operation. Thus, the designs of the CPW-fed antennas have recently received much attention. Many compact printed monopole antennas were manufactured for wireless applications and reported in the literature [6-8]. Some of these monopole antennas have been investigated especially for RFID applications [9-16].

In this paper, we propose a new design of uni-planar dual-band F monopole antenna fed by a CPW line (see Figure 2). The proposed antenna is particularly simple in manufacturing owing to its single dielectric and single metal layer. The two operating modes of the proposed antenna are associated with various lengths of two monopoles, in which the longer monopole works for the first resonant mode and the shorter monopole works for the second mode. In this study, several designs are investigated by simulation, and the characteristics of the return loss and radiation patterns are analysed and discussed.



Figure 1. Block Diagram of an RFID System

## 2. ANTENNA DESIGN

Figure 2 shows the geometry of the proposed dual band CPW-fed printed monopole antenna for RFID applications.

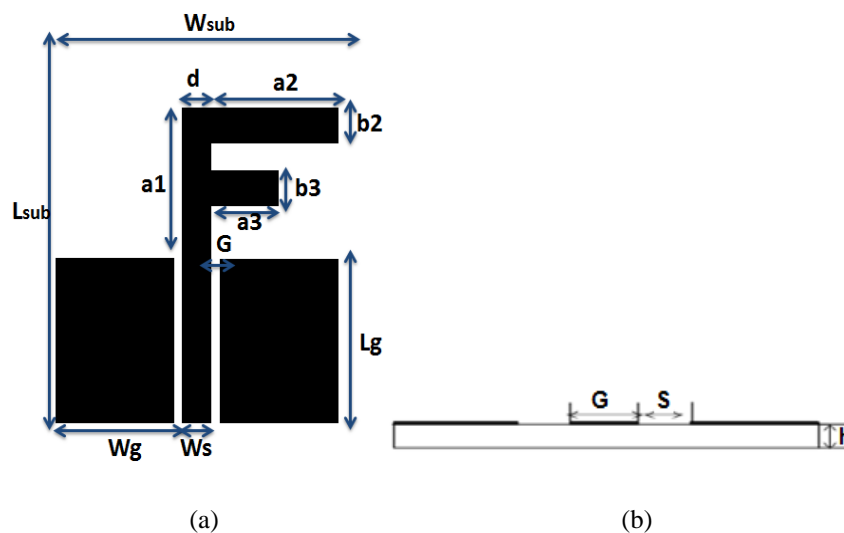


Figure 2. (a) Geometry of the proposed antenna top view and (b) side view

The strip width ( $W_s$ ) and gap ( $G$ ) of the Coplanar Waveguide (CPW) feed are derived using standard design equations for  $50\Omega$  input impedance, in order to match the characteristic impedance of transmission line. The characteristic impedance of a conventional coplanar waveguide structure can be computed using standard equations [17]. Due to the presence of different lengths of the two elements, the first resonant frequency of the proposed antenna is expected to be controlled mainly by the length of the longer element, and the second resonant frequency is greatly dependent on the length of the shorter element. The final optimized dimensions of the antenna through EM simulations are presented in Table 1.

Table 1. Dimension of the proposed antenna

Parameter	Value (mm)
Lsub	38
Wsub	35
Lg	22
Wg	15.8
a1	12.6
a2	14.6
a3	4.6
b2= b3	2
d	2.7

The antenna performance was studied by using the computer simulation technology (CST) microwave studio [18]. To validate our use of design software CST, we designed and simulated the same structure using ADS "Advanced Design System" simulator software [19]. Figure 3 illustrates the reflection coefficient obtained from both simulation tools.

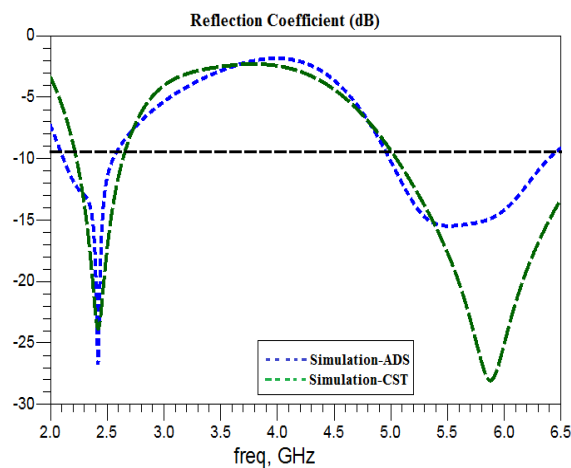


Figure 3. Simulated return loss of the proposed antenna versus frequency

The reflection coefficient curve shows that the designed antenna resonates at 2.45 GHz with a bandwidth of 120 MHz (2.4–2.52 GHz) and at 5.8 GHz with an impedance bandwidth of 1.4 GHz (5.1–6.5 GHz). The maximum return loss of -27dB and -28.5dB is obtained at the resonant frequencies of 2.45 GHz and 5.85 GHz respectively.

We can observe a difference in return loss obtained with CST and ADS due to the technique of calculation used in each simulation software. CST is 3D EM simulator based upon Finite Integration Technique (FIT) while ADS is 2D EM simulator based upon the Method of Moment (MoM).

A parametric study of the proposed antenna has been conducted in order to study the effects of different elements of the antenna on return loss. The parametric study of the proposed antenna is performed by using computer simulation technology (CST) microwave studio. The results for the case of a single element of length  $a_2$  are shown in Figure 4. It is clear to see that when the antenna uses a single element, only one resonant mode is excited at about 2.3 GHz for  $a_2=15.2$  mm and 3.1 GHz for  $a_2=7$  mm. While for the antenna having two elements we obtain the two resonant frequencies of 2.45 GHz and 5.8 GHz with good matching input impedance.

Figure 5 shows the simulated reflection coefficient of the antenna as a function of frequency for the different values of  $a_3$  while other parameters are fixed. It can be seen from the Figure 5 that the length of  $a_3$  has a clear effect on the position of the second resonant frequency. When increasing the length of  $a_3$ , we notice that the second resonant frequency gets lower.

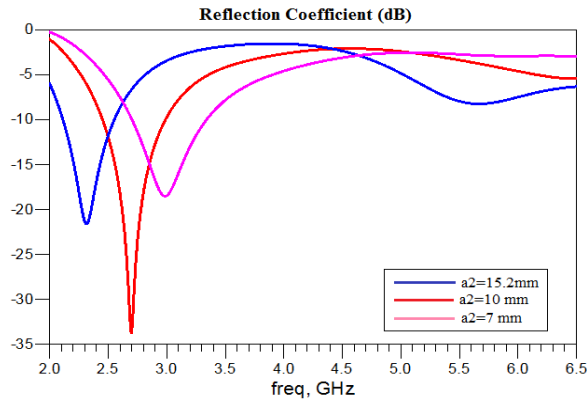


Figure 4. Simulated Reflection coefficient for different lengths of ( $a_2$ ) parameter versus frequency with other parameters fixed



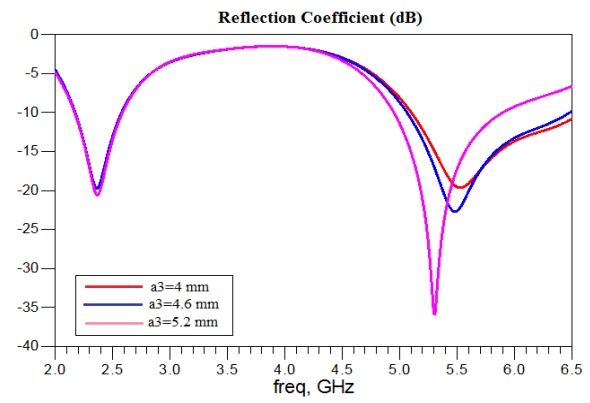


Figure 5. Simulated Reflection coefficient for different lengths of ( $a_3$ ) parameter versus frequency with other parameters fixed

The 2D radiation patterns are given by Figure 6 and Figure 7 respectively in the plane E and plane H, in the low frequency 2.45 GHz and the high frequency 5.8 GHz.

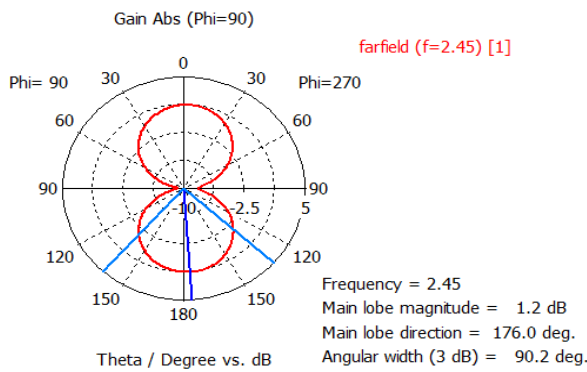


(a)

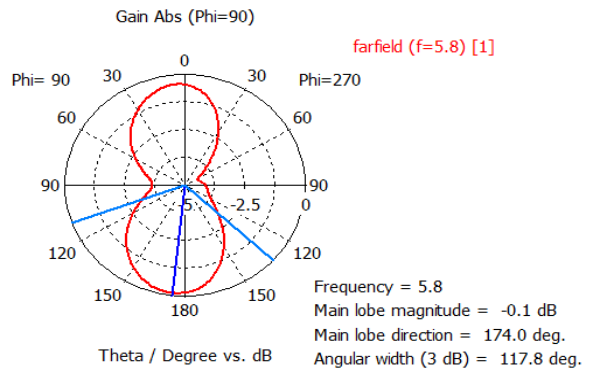


(b)

Figure 6. 2D radiation pattern in E –plane for the designed structure at resonant frequency, (a) fr of 2.45 Ghz, (b) fr of 5.8 Ghz

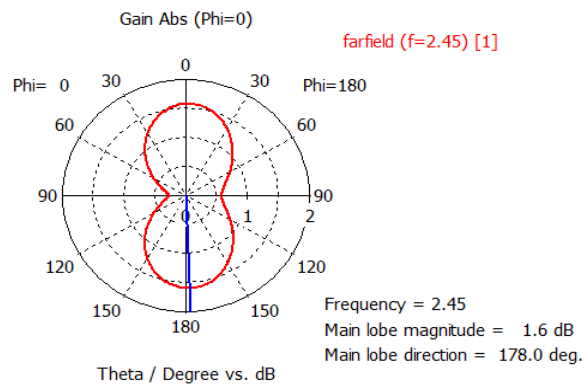

(a)

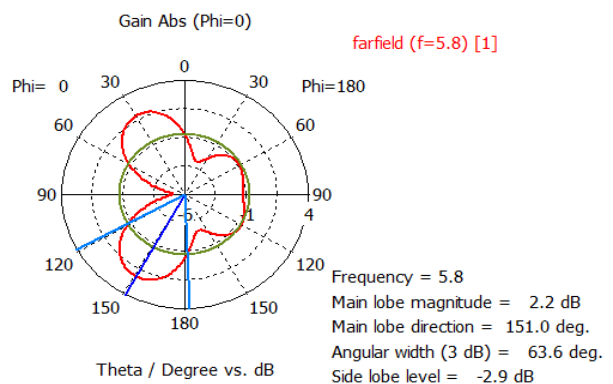

(b)

Figure 7. 2D radiation pattern in H–plane for the designed structure at resonant frequency, (a) fr of 2.45 Ghz, (b) fr of 5.8 Ghz

### 3. FABRICATION AND MEASUREMENT RESULTS

After the conception and optimization of the dual-band antenna by using ADS and CST, the prototype of the investigated antenna was fabricated on FR4 substrate using the Chemical etching machine, then measured to verify the performance of the results obtained from simulation. The photograph of the fabricated monopole antenna is given in Figure 8.

The return loss was measured by using Vectorial Network Analyzer (VNA) PNA-X from Agilent Technologies. The kit of calibration used is 3.5 mm from Agilent Technologies composed from Open, Short and Load components; losses in the different transitions are taken into account (Figure 9).



Figure 8. Photograph of the fabricated structure



Figure 9. Calibration Kit 3.5 mm

After the calibration, the return loss for the achieved antenna as shown in the Figure 10 is tested. In the same time, both the simulations on ADS and CST with measurement results are compared.

Small discrepancies between the measured and simulated results are observed, due to cable effects, SMA connector and fabrication imperfection.

The reflection coefficient curve shows that the present antenna is fed at 2.45 GHz with a  $-10$  dB return loss bandwidth of 400 MHz (2.2–2.6 GHz) and at 5.8 GHz with an impedance bandwidth of 1300MHz (5.2–6.5 GHz).

The radiation patterns were measured in anechoic chamber as shown in Figure 11.

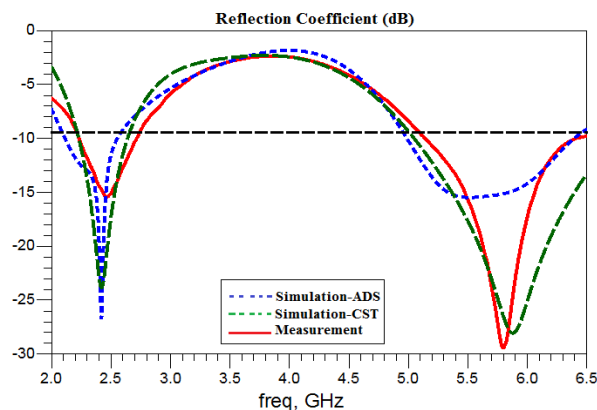


Figure 10. Comparison of simulated and measured return loss



Figure 11. Anechoic chamber

The measured far-field radiation pattern characteristics of the proposed antennas in E-plane and H-plane at 2.45 GHz and 5.8 GHz are presented in Figure 12 and Figure 13. The measured results shows that the good omni-directional patterns in the H-plane and the nearly bidirectional patterns in the E-plane are obtained for all frequency bands.

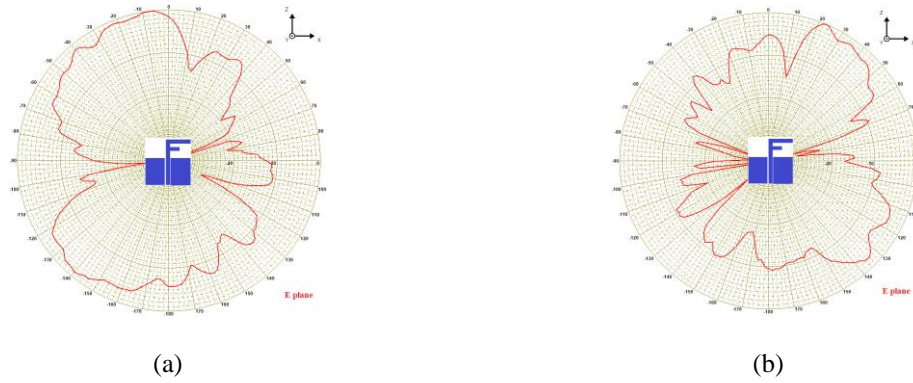


Figure 12. Measured radiation patterns at 2.45 GHz (a) and 5.8 GHz (b) in the E-plane

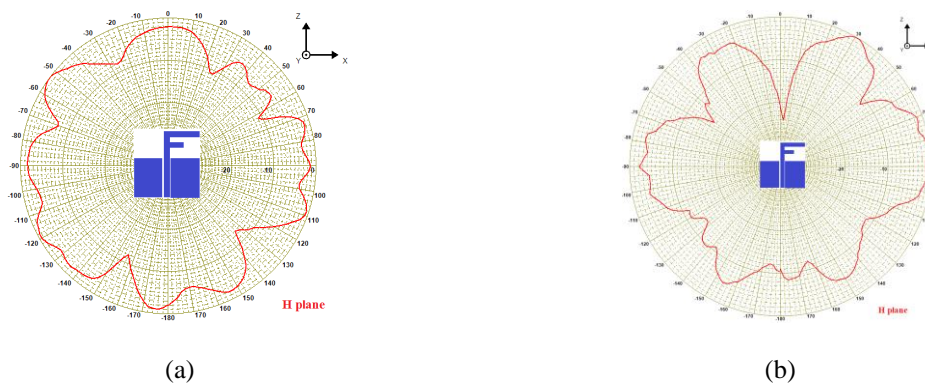


Figure 13. Measured radiation patterns (a) at 2.45 GHz and (b) 5.8 GHz in the H-plane

The following Table 2 presents a comparison of the proposed antenna with other antennas validated in the literature. It can be seen that the proposed antenna is significantly smaller, offers an important bandwidth and a good gain compared to its dimensions.

Table 2. Comparison between the proposed antenna and other research papers

	S11(dB)		Gain (dBi)		Substrate	Antenna size (mm <sup>2</sup> )
	2.45 GHz	5.8 GHz	2.45 GHz	5.8 GHz		
Ref [20]	-11	-18.6	2.2	2.31	FR4	71.6 x 94
Ref [21]	-16	-14	6.30	5.16	Teflon	75x40
Ref [22]	-25	-12	2.4	4.1	FR4	51.3x43.4
Proposed antenna	-16	-29	1.5	2.4	FR4	38x35

#### 4. CONCLUSION

A dual band CPW fed printed monopole antenna for RFID applications has been presented. A dual-band operation is easily achieved by the F-shaped configuration. The proposed antenna is simple to design, light weight and compact in size. It provides good matching input impedance, stable radiation patterns and appropriate gain characteristics in the RFID frequency with a bandwidth of 400 MHz at 2.45 GHz, and 1300 MHz at 5.8 GHz. These results validate the antenna structure for dual-band operations in handheld RFID and WLAN applications.

## ACKNOWLEDGEMENTS

We thank Mr. Mohamed LATRACH Professor in ESEO, Engineering Institute in Angers, France for allowing us to use all the instruments and software available in his laboratory.

## REFERENCES

- [1] K. Finkenzeller, RFID Handbook, "Fundamentals and Applications in Contactless Smart Cards and Identification, 3rd Edition, John Wiley and Sons Inc, New York, 2010.
- [2] Konstantinos Domdouzis, Bimal Kumar, Chimay Anumba, "Radio-Frequency Identification (RFID) applications: A brief introduction", 2006 Elsevier Ltd. *Advanced Engineering Informatics* 21 (2007) 350–355.
- [3] A. El Hamraoui; El H. Abdelmounim; J. Zbitou; H. Bennis; M. Latrach, "A new design of a compact CPW-Fed dual-band printed antenna for RFID applications", International Conference on Wireless Networks and Mobile Communications (WINCOM), October 2015.
- [4] Dominique Paret, RFID EN ULTRA ET SUPER HAUTES FRÉQUENCES UHF-SHF, Théorie et mise en œuvre, Dunod, 2008.
- [5] A. Balanis, "Antenna Theory Analysis and Design", 2nd edition, John Wiley & Sons, Inc, 2003.
- [6] Horng-Dean Chen, Hong-Twu Chen, "A CPW-Fed Dual-Frequency Monopole Antenna", *IEEE Transactions On Antennas and Propagation*, Vol. 52, No. 4, April 2004.
- [7] Thomas, K.G, and Sreenivasan, M, "Compact CPW-fed dual-band antenna", *Electron.Lett.*, 2010, 46, (1), pp. 13–14.
- [8] J. Zhang, X.-M. Zhang, J.-S. Liu, Q.-F. Wu, T. Ying and H. Jin, "Dual-band Bidirectional High Gain Antenna for WLAN 2.4 and 5.8 GHz applications", *Electronics Letters*, Vol. 45(1), pp. 6-7, January 1, 2009.
- [9] Chaouki G, Abdelhak F, Ali G, "A Modified Fractal Bow Tie Antenna for an RFID Reader", *International Journal of Electrical and Computer Engineering (IJECE)*. 2014; 4(3): 441-446.
- [10] T. Lee, J. Jung, H. Lee, Y. Lim, "Modified annular ring slot antenna for dual WLAN band application", Microwave and Millimeter Wave Technology, 2008. ICMMT 2008. International Conference on. Vol. 1. IEEE, pp. 410-412, April 21-24, 2008.
- [11] Ahmed El Hamraoui; El Hassane Abdelmounim; Jamal Zbitou; Hamid Bennis; "Mohamed Latrach, Compact dual-band microstrip slot antenna for UHF and microwave RFID applications", 2016 11th International Conference on Intelligent Systems: Theories and Applications (SITA).
- [12] Ahmed El Hamraoui; El Hassane Abdelmounim; Jamal Zbitou; Hamid Bennis; Mohamed Latrach; "A new compact CPW-fed dual-band monopole antenna for RFID applications" 2016 5th International Conference on Multimedia Computing and Systems (ICMCS).
- [13] J. R. Panda, A. S. R. Saladi, R. S. Kshetrimayum, "A Compact Printed Monopole Antenna for Dual-band RFID and WLAN Applications", *Radioengineering*, Vol. 20, No. 2, June 2011.
- [14] Loubna Berrich, Lahbib Zenkouar, "Microruban Dipole Antenna for RFID Applications at 2.45 GHz", *International Journal of Electrical and Computer Engineering (IJECE)* Vol.6, No.6, pp. 2891-2899, December 2016.
- [15] Abdelhadi Ennajih, Jamal Zbitou, Mohamed Latrach, Ahmed Errkik, Rachid Mandry, "A New Dual Band Printed Metamaterial Antenna for RFID Reader Applications", *International Journal of Electrical and Computer Engineering (IJECE)* Vol. 7, No. 6, pp. 3507-3514, December 2017.
- [16] Omrane Necibi, Dabha Hamzaoui, Tan Phu Vuong, Ali Gharsallah, "A Novel RFID Antenna with HIS Structure for Ka Band", *International Journal on Communications Antenna and Propagation (IRECAP)*, Vol 6, No 6 (2016),
- [17] J. Bahl and P. Bhartia, Microstrip Antennas, Dedham, Ma, Artech House, 1981.
- [18] CST Studio Suite version 2010, <https://www.cst.com>.
- [19] Advanced Design System (ADS) <http://www.home.agilent.com/agilent/home.jsp>
- [20] M.Ihamji, Elh. Abdelmounim, H. Bennis, M. Hefnawi, M. Latrach "Design of Compact Tri-Band Fractal Antenna for RFID Readers". *International Journal of Electrical and Computer Engineering (IJECE)*. Vol. 7, No. 4, August 2017.
- [21] Yongseok Seo, Jinwoo Jung, Hyeonjin Lee, and Yeong seog Lim, "Modified Dual Monopole Antenna For WLAN Operation", *Microwave and Optical Technology Letters / Vol. 53, No. 12, December 2011.*
- [22] Z.-N. Song, Y. Ding, and K. Huang, "A Compact Multiband Monopole Antenna For WLAN/WIMAX Applications", *Progress In Electromagnetics Research Letters*, Vol. 23, 147-155, 2011.

## BIOGRAPHIES OF AUTHORS



**Ahmed El Hamraoui** was born in Berrechid, Morocco, In 30 January 1990. He received the Master degree in Electronic Systems of Aviation Safety from the Mohammed VI International Academy of Civil Aviation Morocco. He is currently working toward the Ph.D. degree in Telecommunication engineering at Faculty of Sciences and Techniques, University Hassan 1<sup>st</sup> in Settat, Morocco. He is involved in the design of microwave hybrid circuits and antennas.



**El Hassane Abdelmounim** received his PhD in applied Spectral analysis from Limoges University at sciences and techniques Faculty, France in 1994. In 1996, he joined, as Professor, applied physics department of sciences and techniques faculty, Hassan 1st University, Settat, Morocco. His current research interests include digital signal processing and machine learning. He is currently coordinator of a Bachelor of Science in electrical engineering and researcher at System Analysis and Information Technology Laboratory.



**Jamal Zbitou** was born in Fes, Morocco, in June 1976. He received the Ph.D. degree in Electronics from the University of Nantes, Nantes, France, in 2005. He is currently a Professor of Electronics in the Faculty of Sciences and Techniques, University Hassan 1<sup>st</sup> in Settat, Morocco. He is involved in the design of hybrid, monolithic active and passive microwave electronic circuits.



**Hamid Bennis** was born in Meknes, Morocco, in September 1977. He received the Ph.D. degree in Computer Science and Telecommunication from the University of Mohammed V Agdal, Rabat, Morocco, in 2011. He is currently a Professor of Computer Science and Computing Network in EST of Meknes, Moulay Ismail University, Meknes, Morocco. He is involved in the design of hybrid, monolithic active and passive microwave electronic circuits.



**Mohamed Latrach** was born in DouarKsiba, Sless, Morocco, in 1958. He received the Ph.D. degree in Electronics from the University of Limoges, Limoges, France, in 1990. He is currently a Professor of microwave engineering with the EcoleSuprieure d'Electronique de l'Ouest (ESEO), Angers, France, where his research involves RF and microwaves. His field of interest is the design of hybrid, monolithic active, and passive microwave circuits, metamaterials, LH materials, antennas and their applications in wireless communications, and wireless power transmission.